



Ausführung
für Hand-/Fernantrieb

Version for
manual or remote operation

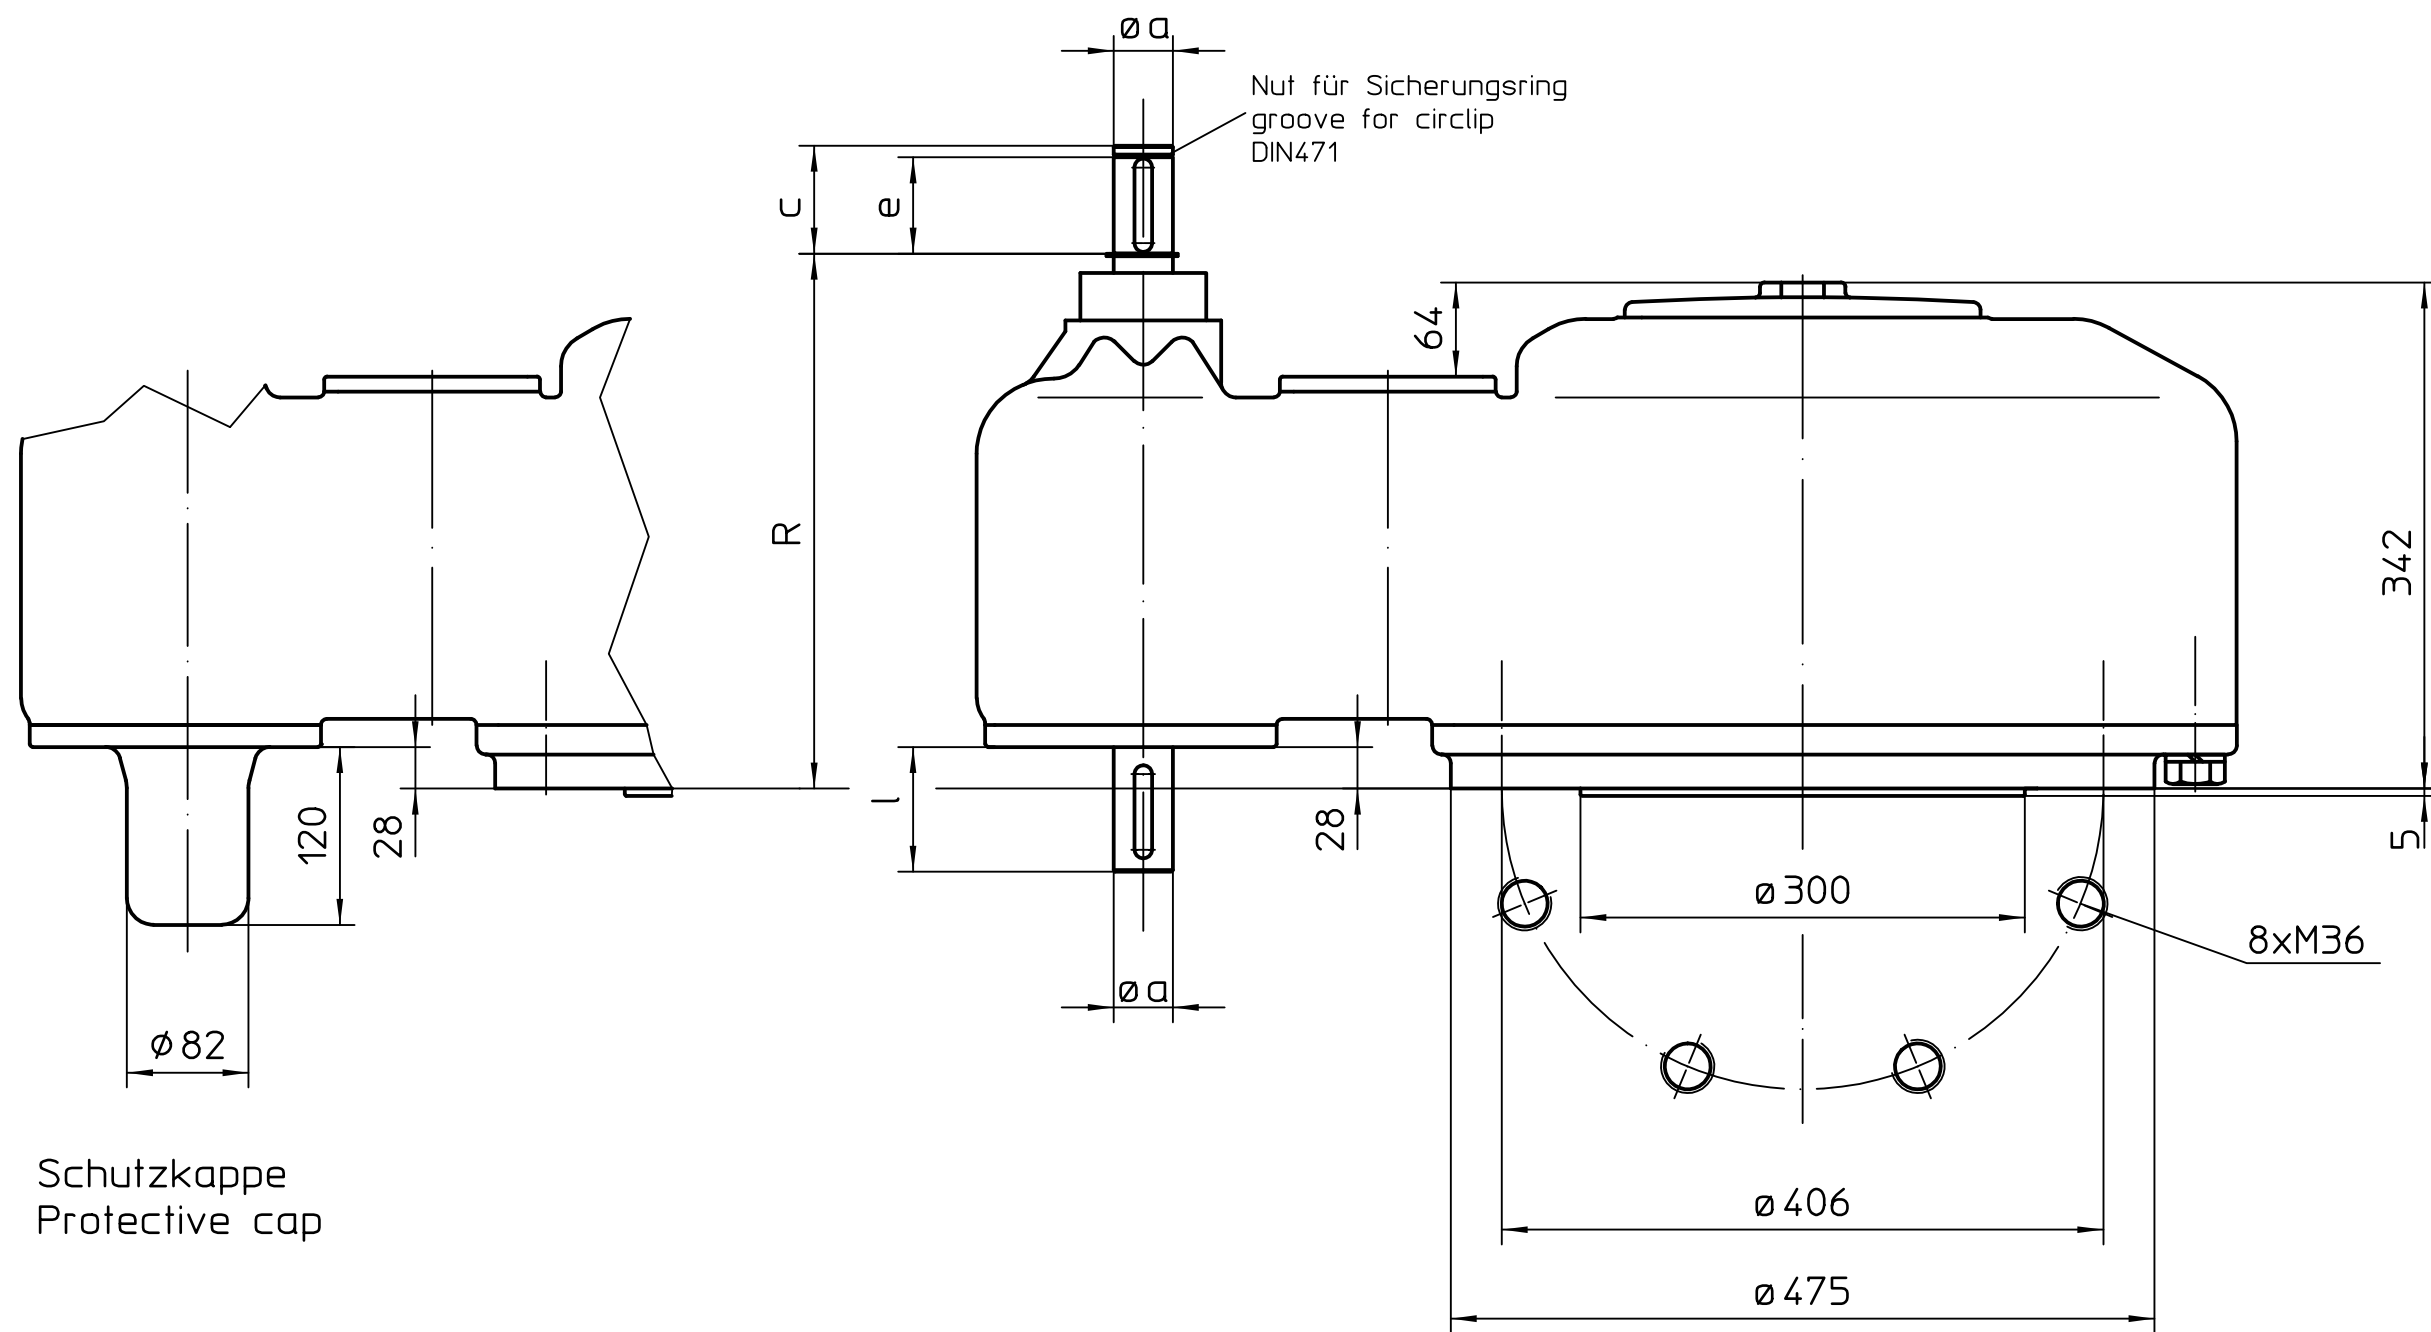

Schutzhappe
Protective cap

Unterkante Getriebe
=Abtrieb B,C,E
Base of gearbox
=Output drive B,C,E

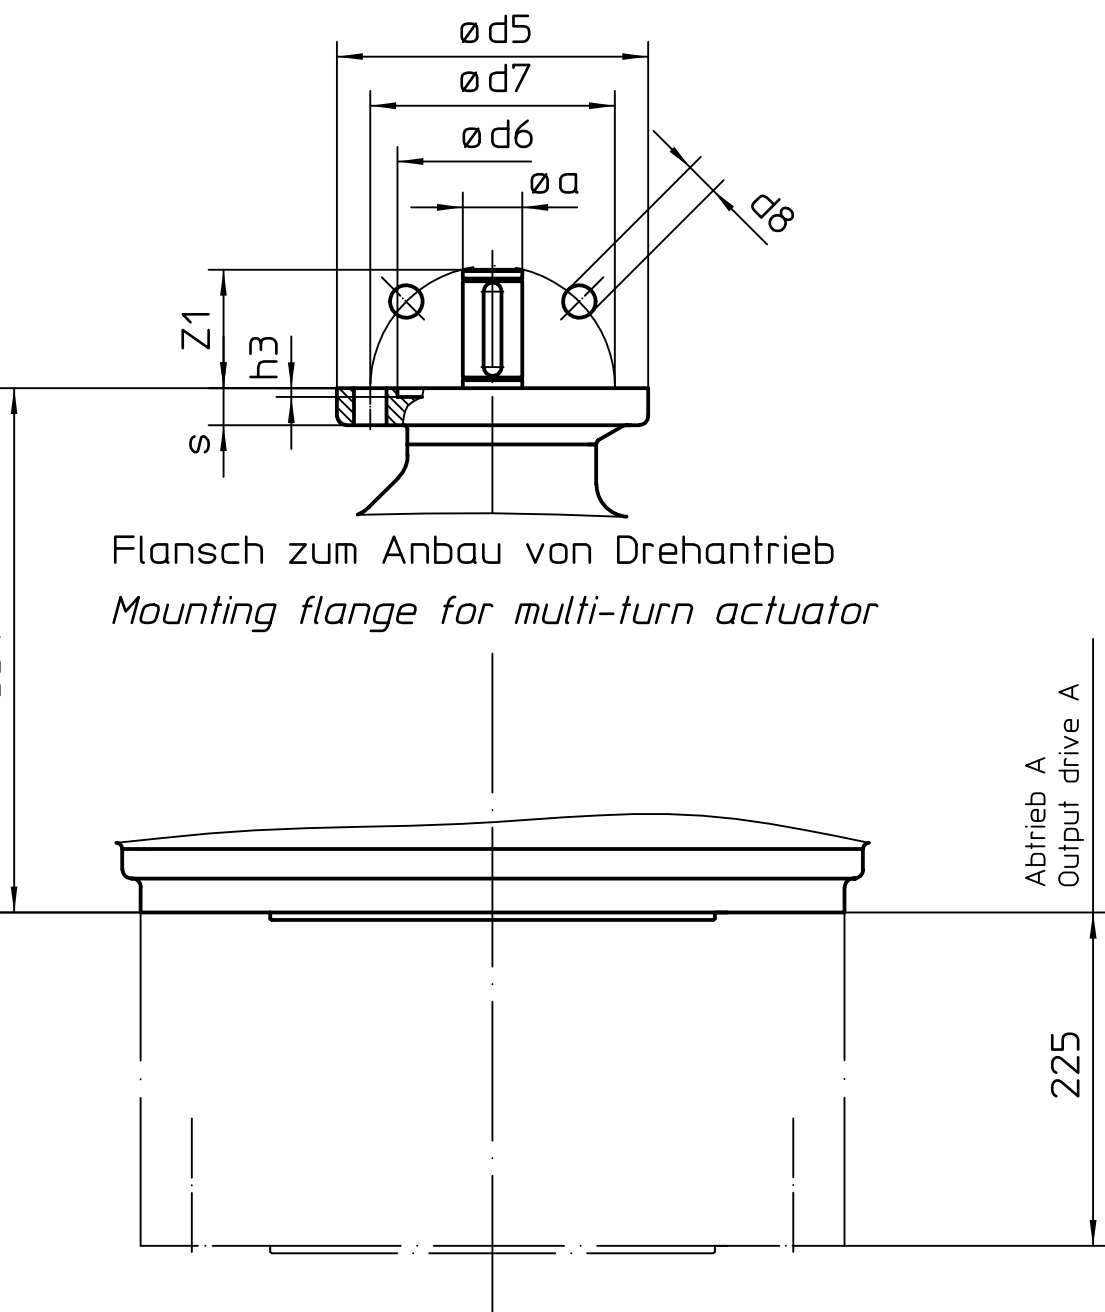

	G3/F16	F25	G4
$\phi d5$	210	300	300
$\phi d6$	130	200	160
$\phi d7$	165	254	254
$\phi d8$	22	18	18
$h3$	6	6	6
a	40	50	50
c	73	100	100
e	65	-	-
l	80	100	100
s	25	25	25
R	361	354	354
$Z1$	80	100	100

Art.- Nr.	Allgemeintoleranz ISO 2768 - mK				Maßstab 1:5	auma [®] AUMA Riester GmbH & Co. KG	
					Datum	Name	
					Bearb.	2012-09-04	Altmann
					Gepr.	2012-09-05	Duffner
					Freig.	2012-09-05	Altmann
					AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218		
01	442/2012	2012-09-04	Alt		GST40.1		
Zust.	Änderung	Datum	Name				
						U2.1088	Blatt- Nr. 1
							Anz. 1

Alle Maße in mm
All dimensions in mm

Für alle übrigen Maße der Stellantriebe/Getriebe siehe Maßblatt neuester Ausgabe
For all other dimensions of actuators/gear boxes refer to latest issue of dimension sheet