

Technical drawing of a mechanical component, likely a pump or motor assembly, showing front and side views with dimensions.

Front View Dimensions:

- Top flange width: 115
- Top flange thickness: 103
- Top flange hole diameter: 40
- Top flange hole spacing: 115
- Top flange hole diameter: 11
- Top flange hole diameter: 94
- Top flange hole diameter: 237


Side View Dimensions:

- Top flange thickness: 115
- Top flange hole diameter: 94
- Top flange hole diameter: 237
- Top flange hole diameter: 115
- Top flange hole diameter: 103
- Top flange hole diameter: 40
- Top flange hole diameter: 11
- Top flange hole diameter: 94
- Top flange hole diameter: 237

Other Dimensions:

- Top flange hole diameter: 115
- Top flange hole diameter: 103
- Top flange hole diameter: 40
- Top flange hole diameter: 11
- Top flange hole diameter: 94
- Top flange hole diameter: 237

1) Gewinde für Kabeleinführungen
gemäß Auftragsbestätigung bzw.
techn. Datenblatt
*Threads for cable entries
according to order acknow-
ledgement or techn. data*

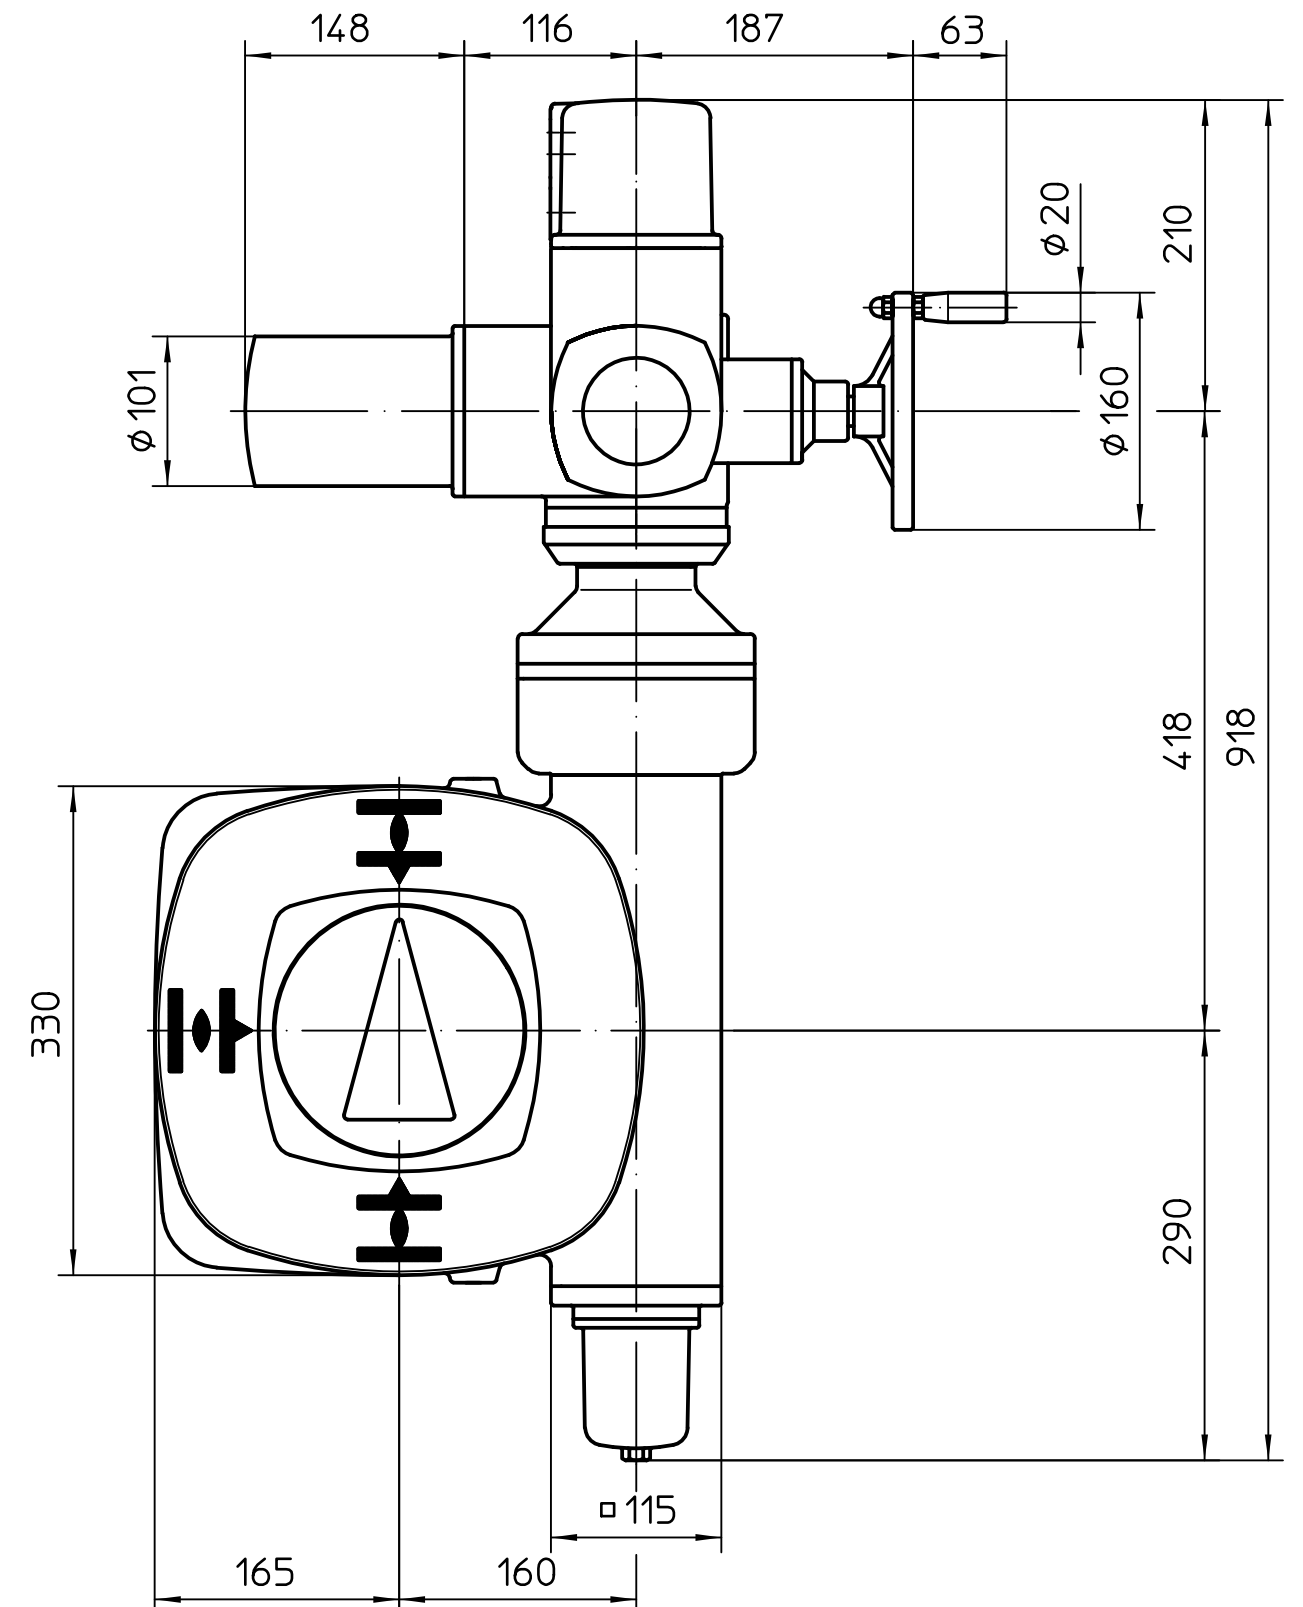

Montage-Position A/Mounting position A

Art.-Nr.					Allgemeintoleranz ISO 2768 - mK		Maßstab		auma® AUMA Riester GmbH & Co. KG										
							1:5												
						Datum	Name		SA(R)07-GS160.3 -GZ160.3-F25-RR-RL										
					Bearb.	2010-07-30	Altman												
					Gepr.	2010-09-09	Emenegger												
					Freig.	2010-09-10	Altman												
					AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218								U3.2030		Blatt-Nr. 1				
03	519/2009	2010-07-30	Alt																Anz. 1
02	352/2005	2005-09-09	Duf																
01	Rev.1	2004-06-23	Wal																
Zust.	Änderung	Datum	Name																