

Version KES
Version KES

404

150


1)

Version KPH
Version KPH

292

115

1)

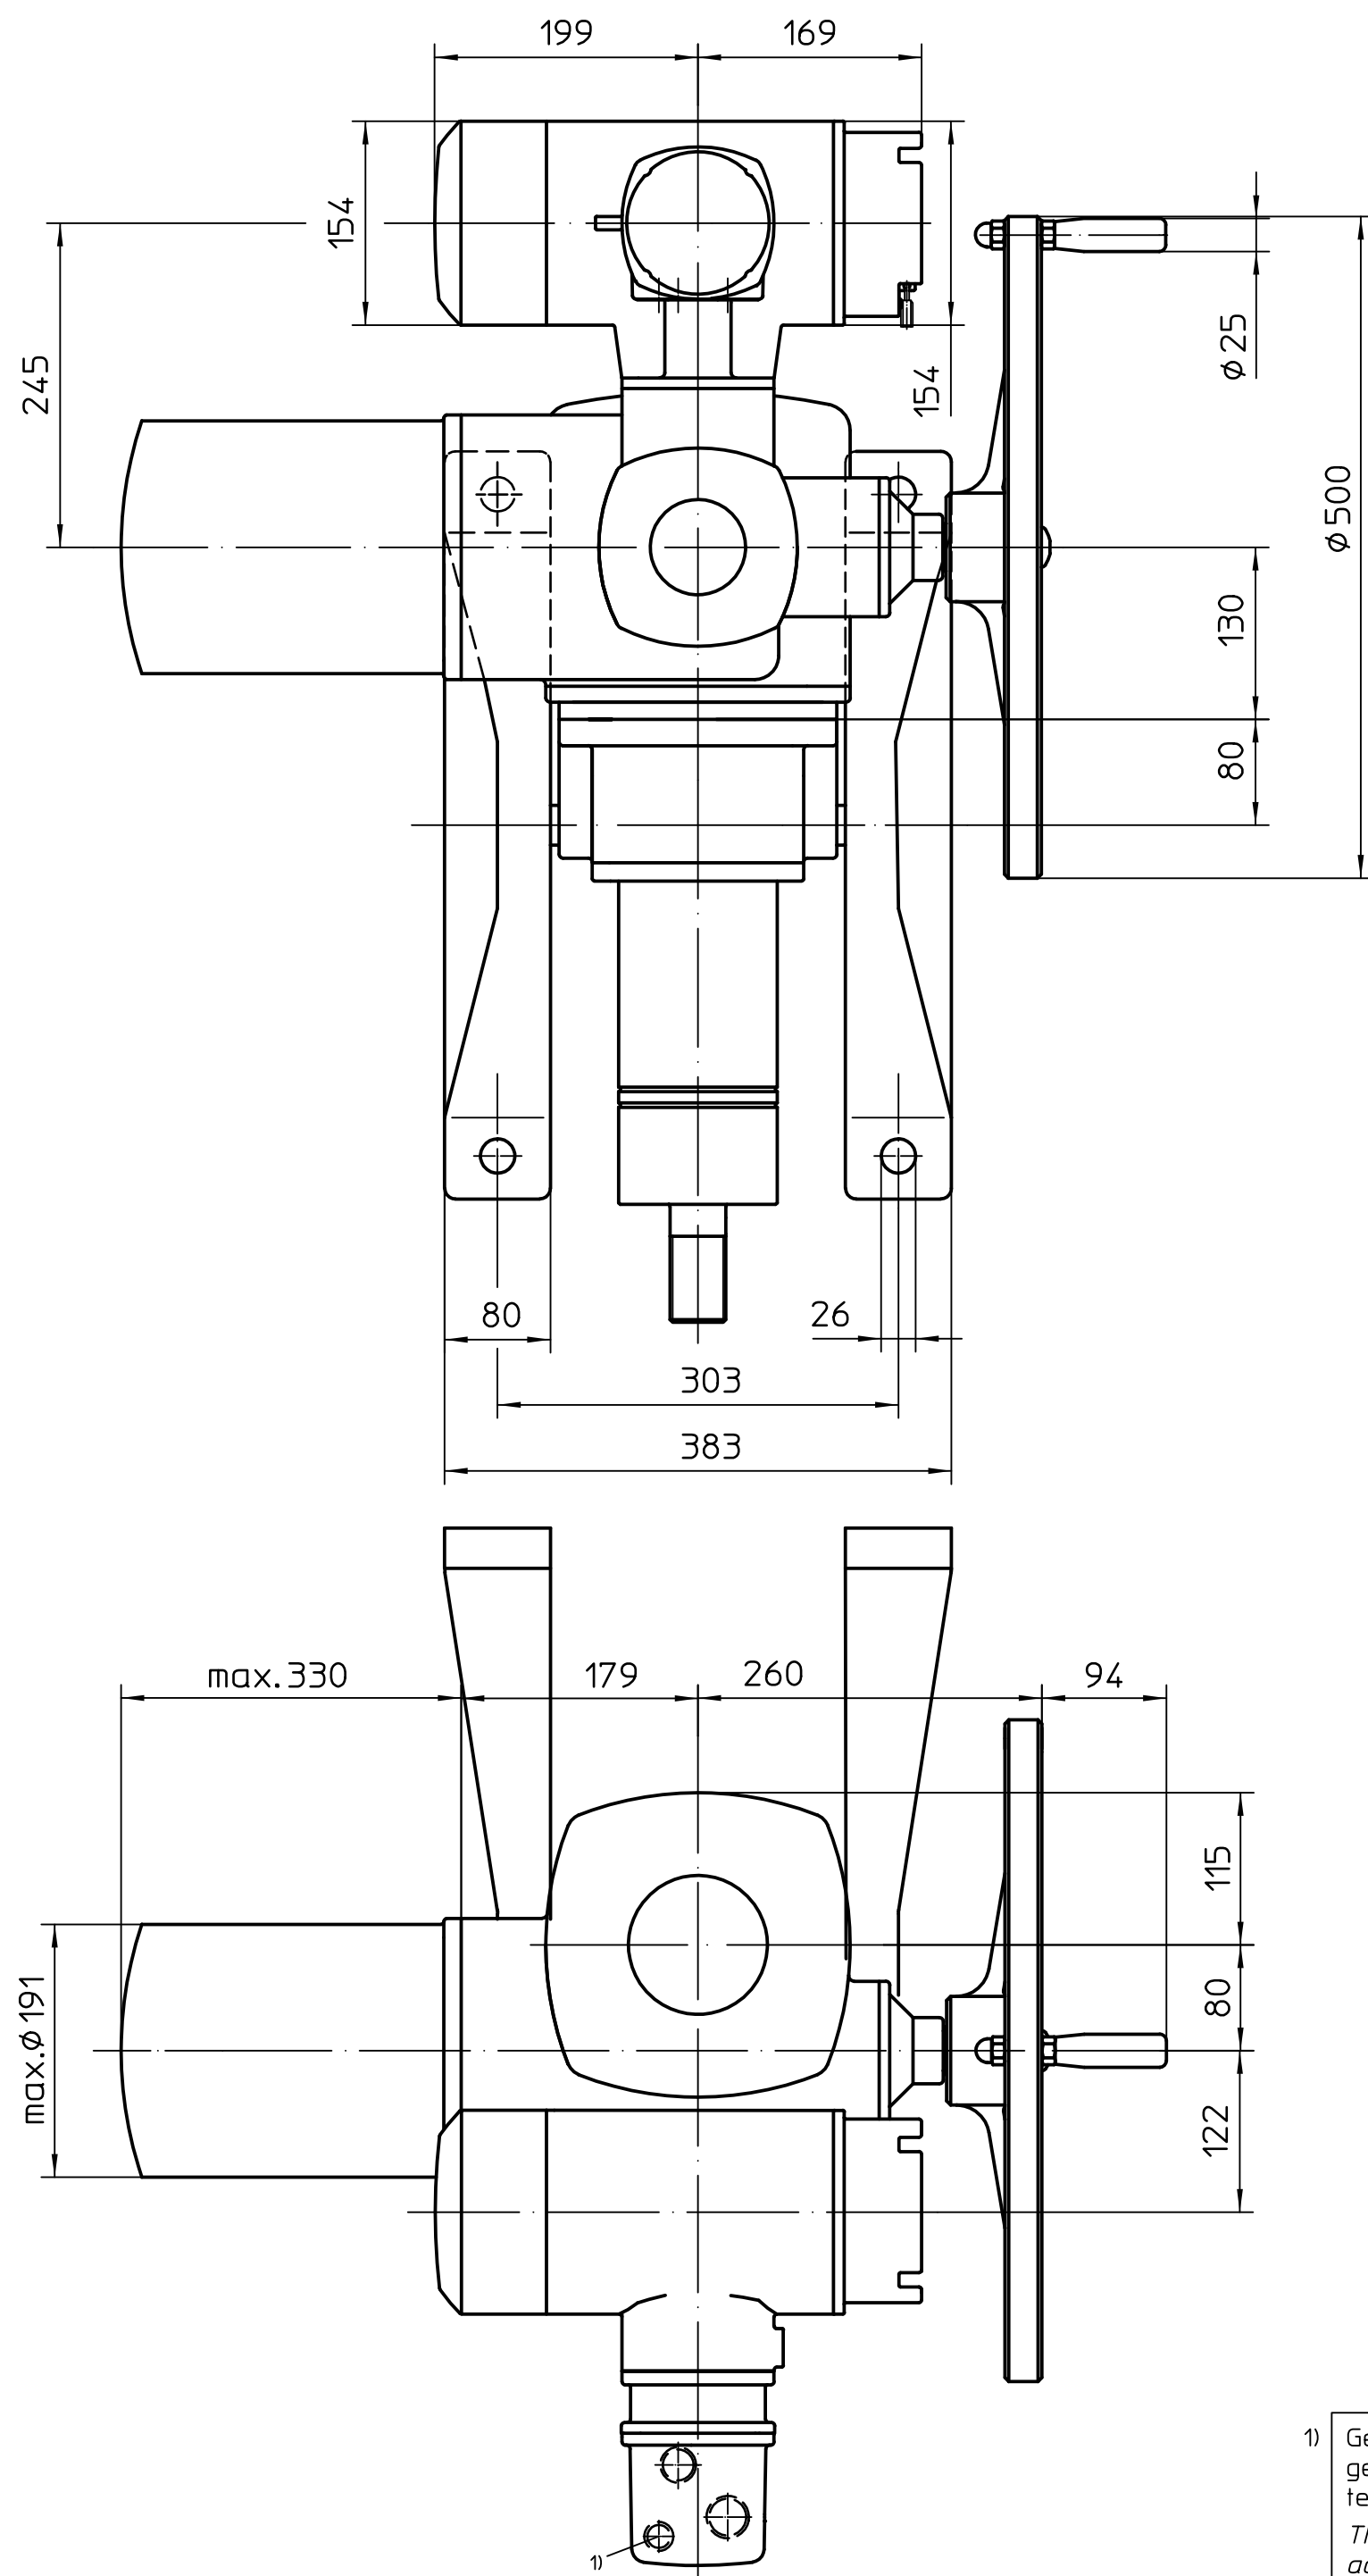

ZWILLING

max. 140°

565

500

32

89

65

M42x3

max. 25°

H

Hub/stroke

315

307

g

150


115

Detail X

M 1:2,5

76

29

Art.- Nr.				Allgemeintoleranz ISO 2768 - mK		Maßstab 1:5		 AUMA Riester GmbH & Co. KG					
								SA(R)ExC16.1-AC- LE200.1 mit Fuss					
				Datum		Name							
				Bearb. 2013-01-28		Goltsev							
				Gepr. 2013-01-29		Duffner							
				Freig. 2013-01-29		Goltsev							
				AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218								Blatt- Nr. 1	
02	04/2013	2013-01-28	Gol	U3.3929								Anz. 1	
01	646/2012	2012-12-17	Gol										
Zust.	Änderung	Datum	Name										