


Technical drawing of a vertical hydraulic cylinder. The drawing includes the following dimensions and features:

- Top Flange:** Diameter 103 mm, width 40 mm. It has four mounting holes, with one hole labeled '1)'. The distance between the center of the mounting holes is 115 mm.
- Body:** Total height 328 mm. The distance from the top flange to the center of the piston rod is 115 mm. The distance from the bottom of the cylinder to the center of the piston rod is 170 mm.
- Piston Rod:** Diameter 230 mm. The distance from the center of the piston rod to the center of the mounting holes is 95 mm.
- Mounting Plate:** Diameter 350 mm. It has four mounting holes, with one hole labeled 'M20'. The distance between the center of the mounting holes is 298 mm.
- Other Dimensions:** The distance from the bottom of the cylinder to the center of the mounting holes is 90 mm. The distance from the bottom of the cylinder to the center of the piston rod is 5 mm.

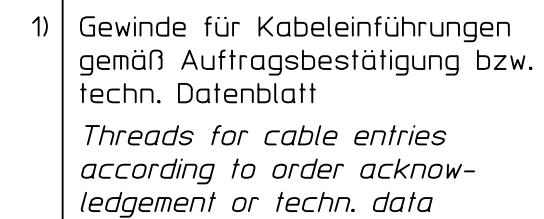

Für alle übrigen Maße der Stellantriebe/Getriebe siehe Maßblatt neuester Ausgabe
For all other dimensions of actuators/gear boxes refer to latest issue of dimension sheet

Art.- Nr.				Allgemeintoleranz ISO 2768 - mK		Maßstab 1:5		 AUMA Riester GmbH & Co. KG					
						Datum		Name		SA(R)07.2-GS160.3-F30 -GZ160.3-RR-RL			
				Bearb. 2012-12-20		Goltsev		U2.3936				Blatt- Nr. 1 Anz. 1	
				Gepr. 2012-12-21		Duffner							
				Freig. 2012-12-21		Goltsev							
				AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218									
	Zust.	Änderung	Datum	Name		gilt auch für/also valid for SA07.6							