


Technical drawing of a mechanical part, likely a valve or actuator, showing a side view and a top view. The side view shows a cylindrical body with a flange at the top and a threaded section at the bottom. The top view shows a circular flange with a central hole and four mounting holes. Dimensions are provided in millimeters.

Dimensions:

- Top view (flange):
 - Overall diameter: $\phi 350$
 - Inner diameter: $\phi 298$
 - Central hole diameter: $\phi 230$
 - Distance from center to mounting hole: 122
 - Distance between mounting holes: 80
 - Flange thickness: 15
- Side view:
 - Overall height: 408
 - Flange diameter: $\phi 350$
 - Flange thickness: 15
 - Distance from flange to bottom: 209
 - Bottom diameter: $\phi 82$
 - Thread specification: M 20

1) Gewinde für Kabeleinführungen
gemäß Auftragsbestätigung bzw.
techn. Datenblatt
*Threads for cable entries
according to order acknow-
ledgement or techn. data*

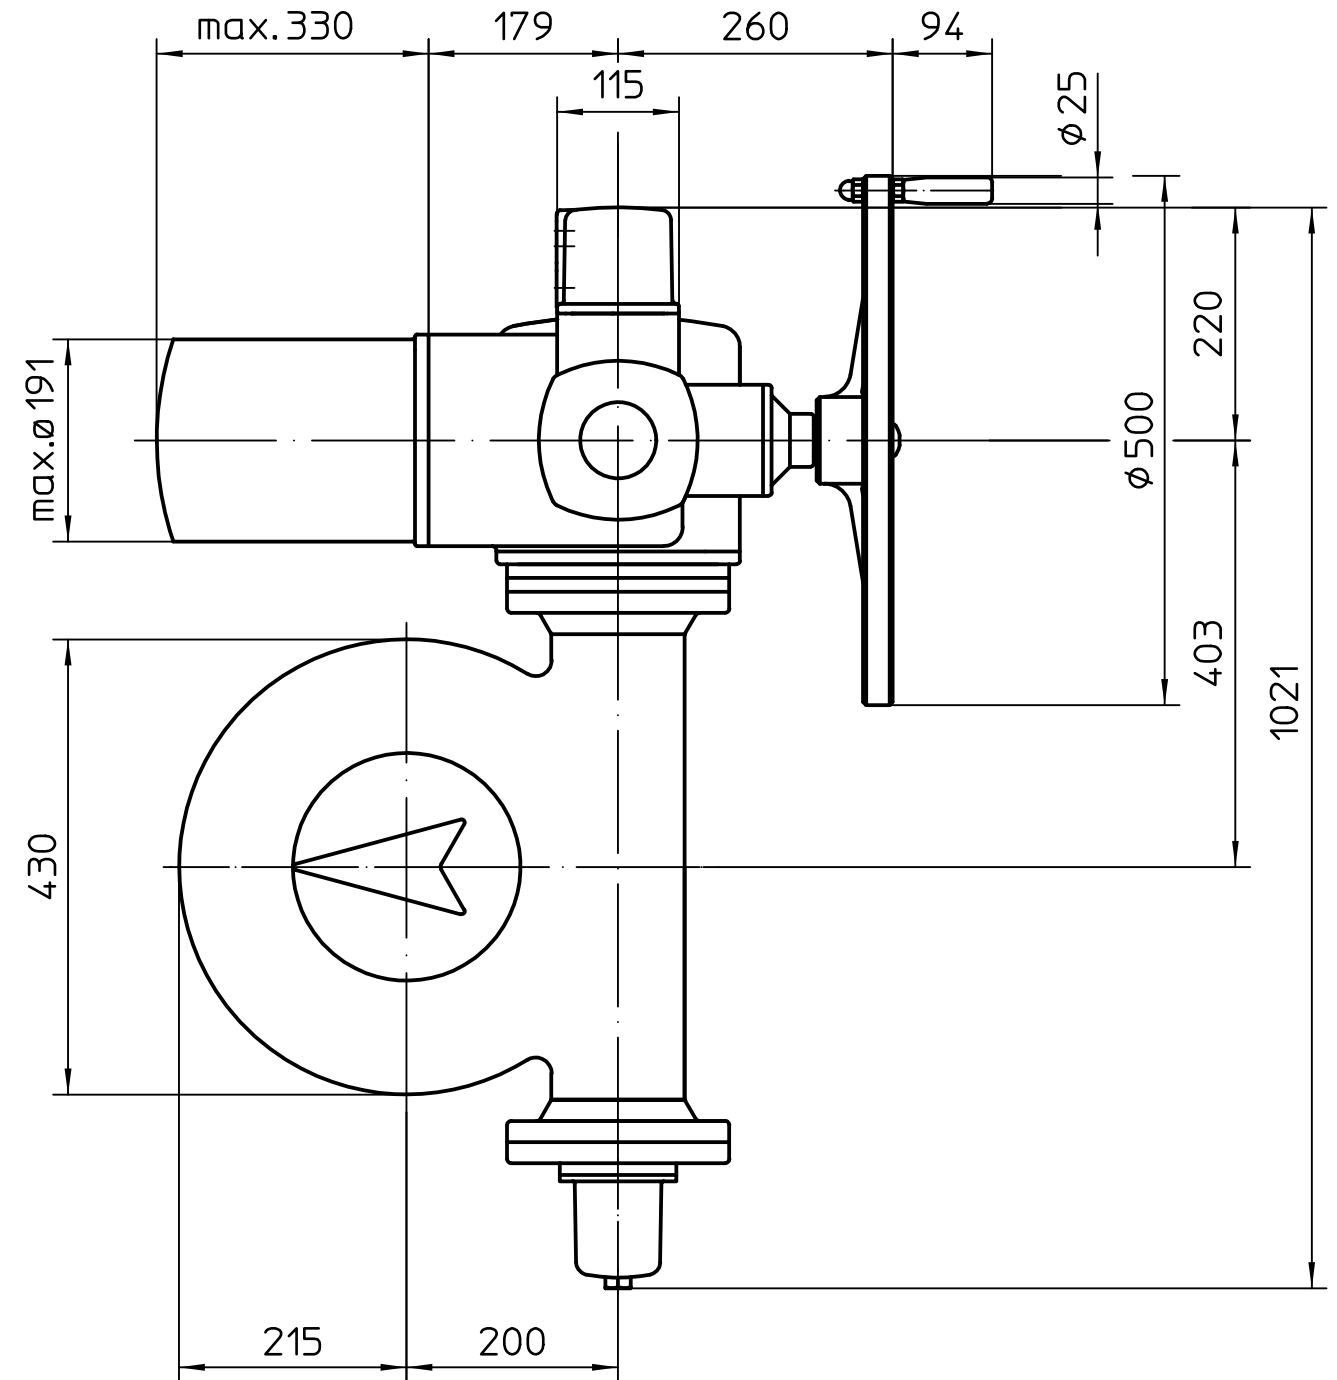

Art.-Nr.					Allgemeintoleranz ISO 2768 - mk		Maßstab		 AUMA Riester GmbH & Co. KG		
							1:7				
						Datum	Name		SA(R)16.1-GS200 -Version RR-RL		
					Bearb.	2010-07-01	Altmann				
					Gepr.	2010-07-13	Emenegger				
					Freig.	2010-07-13	Altmann				
					AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218					Blatt-Nr. 1 Anz. 1	
	03	519/2009	2010-07-01	Alt						U3.0688	
	02	Rev.1	2004-04-27	Wal							
	Zust.	Änderung	Datum	Name							