
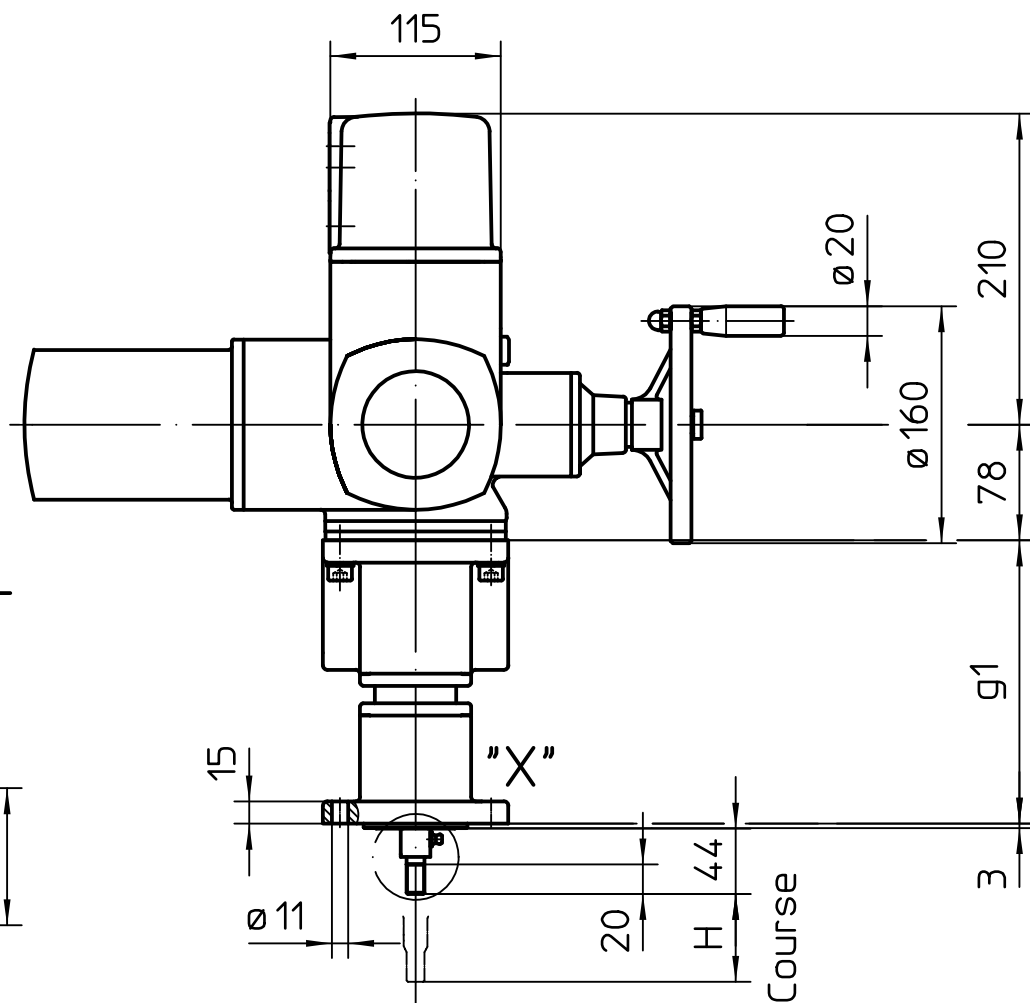

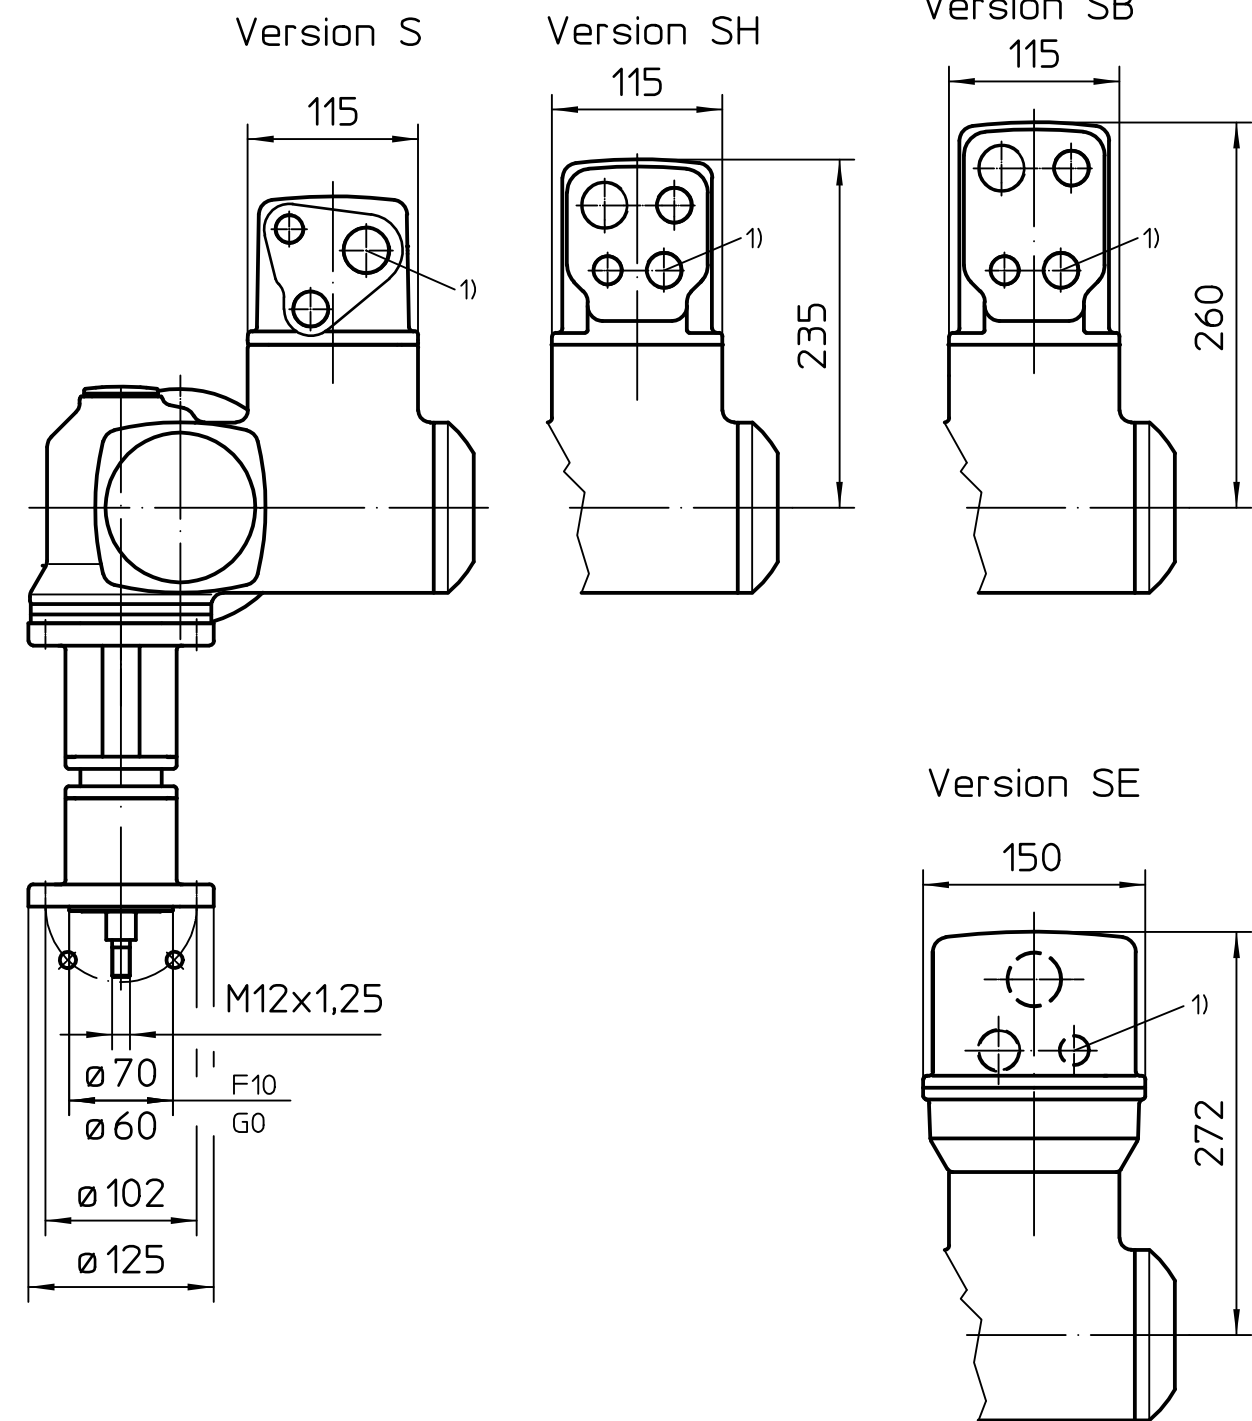


Détail X
M 1:2**Course en option H**

g1 maxi. mm

191	50
241	100
341	200
541	400
641	500

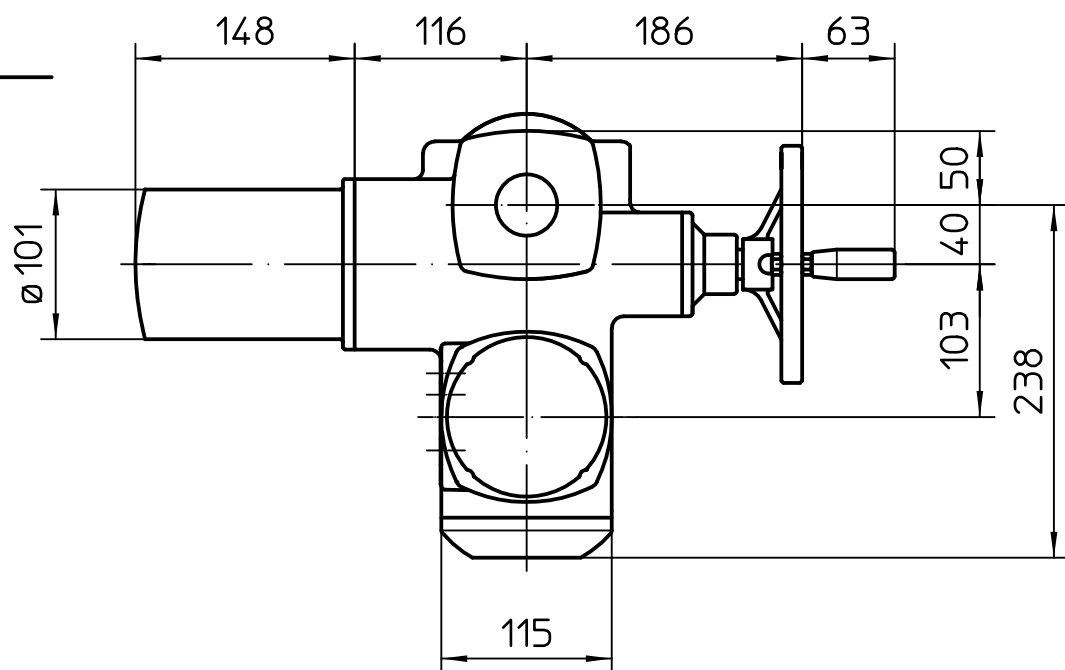

1) Taraudage pour entrées de câbles selon AR ou fiche de données techniques

* aussi valable pour : SA07.6

							Echelle		auma® AUMA Riester GmbH & Co. KG					
							1:5							
						Date	Nom		SA(R)07.2-LE12.1					
					Edité	2021-04-23	Goltsev							
					Testé	2021-04-23	Demir							
					Approuvé	2021-04-23	Goltsev							
					AUMA Riester GmbH & Co. KG P.O. Box 1362 79373 Muellheim/Germany Tel. +49 7631 809-0 Fax +49 7631/13218						U3.3321			
	02	0337/2021	2021-04-23	Gol							Page 1			
	01	579/2018	2018-08-31	Duf							Qté 1			
	Etat	Révision	Date	Nom							* - SA07.6			

Toutes les dimensions en mm

Pour toutes les autres dimensions des servomoteurs/réducteurs,
cf. fiche de dimension la plus récente