


A vertical line with seven horizontal tick marks. The segments between the tick marks are labeled A, B, C, D, E, F, and G from top to bottom.

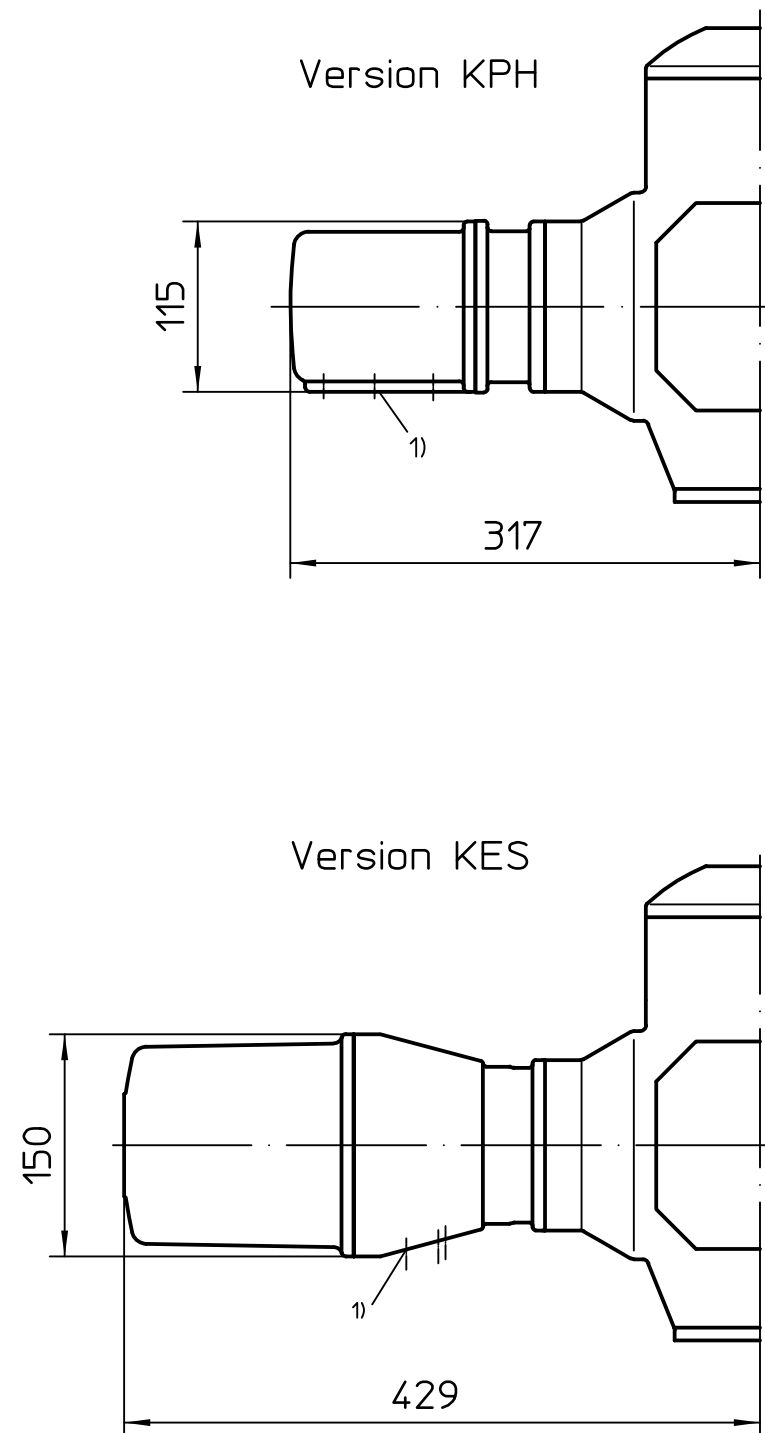

g1	maxi. mm
191	50
241	100
341	200
541	400
641	500

Technical drawing of a bolt. The drawing shows a bolt with a hexagonal head and a threaded shank. The dimension 18 is indicated for the width across the flats of the head. The dimension 37 is indicated for the length of the shank.

M12x1,25

1) Taraudage pour entrées de câbles selon AR ou fiche de données techniques

* aussi valable pour : SAEx07.6

						Echelle 1:5		auma® AUMA Riester GmbH & Co. KG		
								SA(R)Ex07.2-AM -LE12.1-F10		
					Date	Nom				
				Edité	2019-02-13	Goltsev				
				Testé	2019-02-14	Duffner				
				Approuvé	2019-02-15	Goltsev		U2.4134		
				AUMA Riester GmbH & Co. KG P.O. Box 1362 79373 Mueltheim/Germany Tel. +49 7631 809-0 Fax +49 7631/13218						
01	032/2019	2019-02-13	Golt							Page 1
Etat	Révision	Date	Nom							Qté 1
				* - SAEx07.6						

Pour toutes les autres dimensions des servomoteurs/réducteurs, cf. fiche de dimension la plus récente