

Technical drawing of a mechanical component, likely a pump or motor, showing front and side views with dimensions.


Front View Dimensions:

- Overall width: 286
- Top flange width: 115
- Top flange hole spacing: 119 (center-to-center), 67 (edge-to-center)
- Top flange thickness: 115
- Top flange mounting holes: 4 (2 on each side)
- Top flange mounting holes: M30
- Top flange mounting holes: $\phi 92$
- Top flange mounting holes: 119 (center-to-center), 130 (edge-to-center)
- Top flange mounting holes: 5 (edge-to-center)

Side View Dimensions:

- Overall height: 415
- Internal diameter: $\phi 356$
- Internal diameter: $\phi 260$

Für alle übrigen Maße der Stellantriebe/Getriebe siehe Maßblatt neuester Ausgabe
For all other dimensions of actuators/gear boxes refer to latest issue of dimension sheet

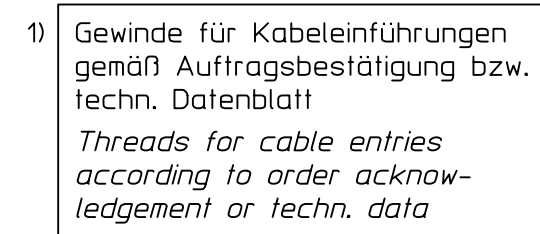

Art.-Nr.				Allgemeintoleranz ISO 2768 - mK		Maßstab		 AUMA Riester GmbH & Co. KG			
						1:5		SA(R)14.2-GS250.3 -GZ250.3-F35-RR-RL			
				Datum		Name					
				Bearb. 2010-10-26		Altmann					
				Gepr. 2010-10-26		Emenegger					
				Freig. 2010-10-26		Altmann					
				AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218						U2.3255	
Zust.		Änderung		Datum		Name		gilt für/valid for SA14.6 - 4:1/8:1			
								Blatt- Nr. 1 Anz. 1			