


Technical drawing of a mechanical component, showing a side view and a top view.

Side View Dimensions:

- Top flange diameter: $\varnothing a$
- Top flange thickness: b
- Top flange hole diameter: $\varnothing 10$
- Top flange hole position: $M10$
- Central shaft diameter: $\varnothing 260$
- Central shaft length: 115
- Base diameter: $\varnothing 415$
- Base height: 96

Top View Dimensions:

- Plate width: 356
- Plate height: 260
- Plate thickness: 5
- Bolt size: $M30$
- Bolt pattern: Four bolts arranged in a square pattern, with a distance of 115 between the center of the bolts.

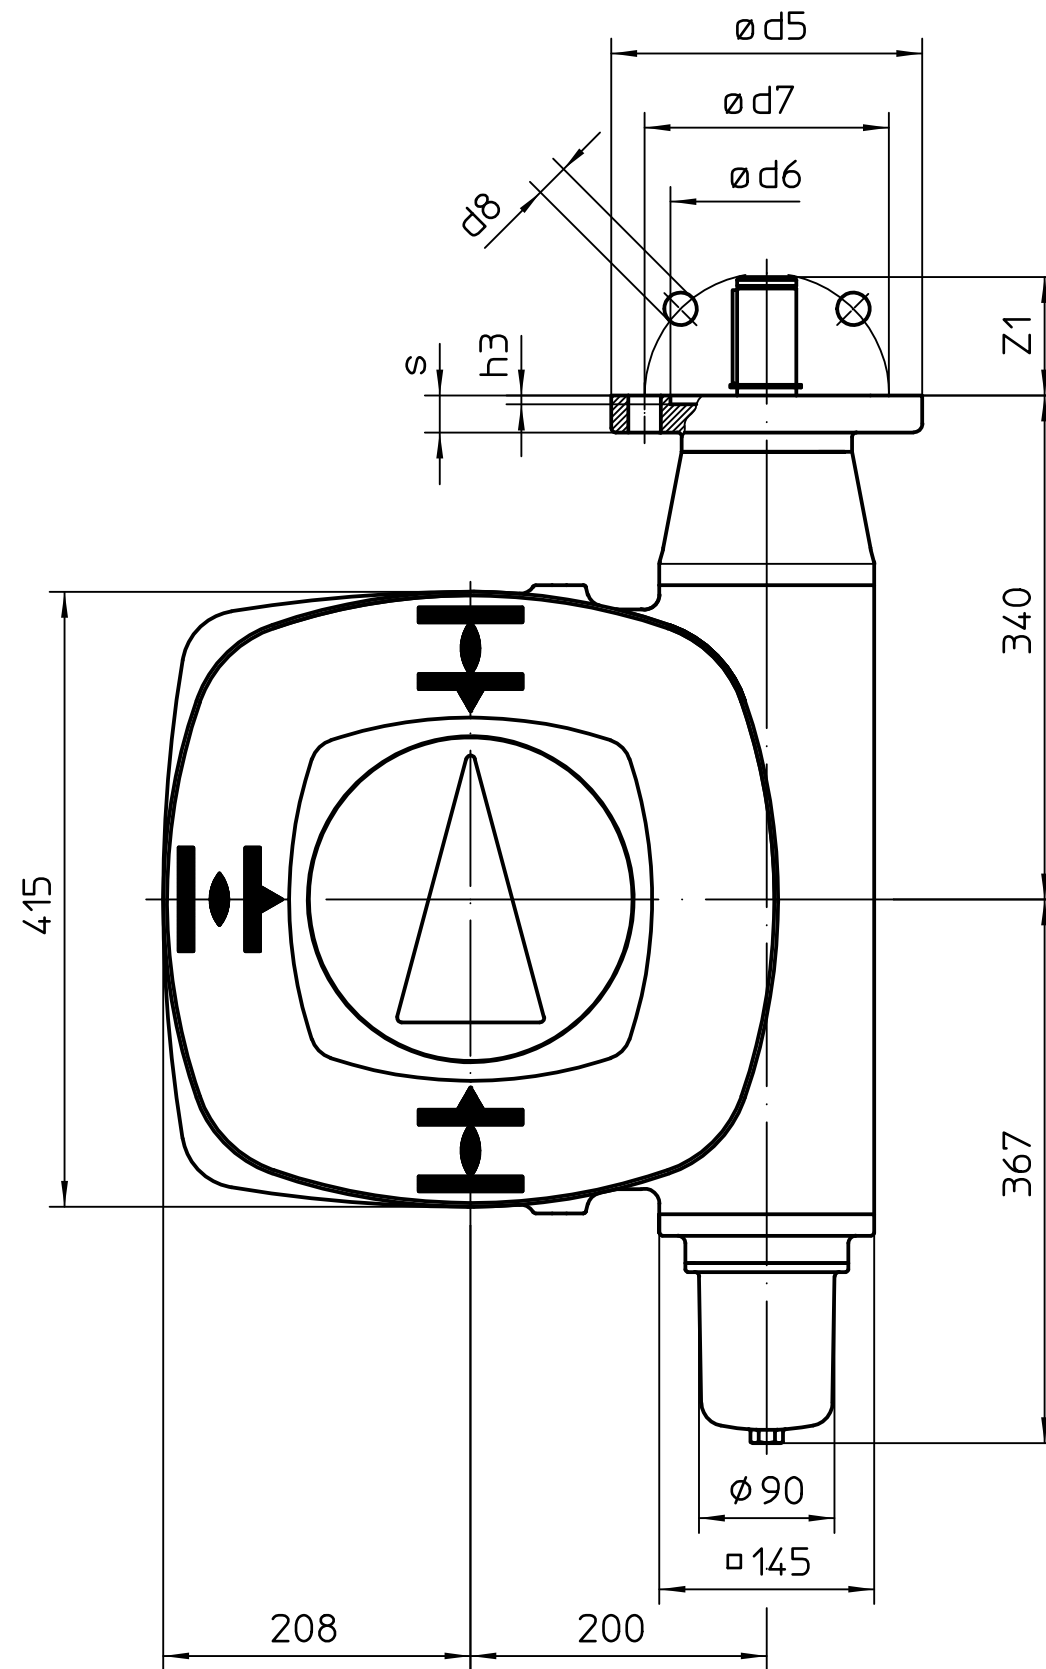

	F16/G3	F25
ød5	210	300
ød6	130	200
ød7	165	254
ød8	22	18
h3	6	6
a	40	40
s	25	25
Z1	80	80
b	12	12
t	43	43

Passmaß	Abmaße
---------	--------

Für alle übrigen Maße der Stellantriebe/Getriebe siehe Maßblatt neuester Ausgabe
For all other dimensions of actuators/gear boxes refer to latest issue of dimension sheet

Art.- Nr.				Allgemeintoleranz ISO 2768 - mK		Maßstab		auma® AUMA Riester GmbH & Co. KG			
						1:5		GS200.3-F35 -Version RR-RL			
					Datum	Name					
				Bearb.	2011-04-12	Altman					
				Gepr.	2011-04-14	Duffner					
				Freig.	2011-04-14	Altman		U3.3359 Blatt- Nr. 1 Anz. 1			
				AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218							
	Zust.	Änderung	Datum	Name							