

Technical drawing of a mechanical component, likely a valve or actuator, showing a top view and a side view.

Top View Dimensions:

- Overall width: 443
- Distance from left edge to centerline: 119
- Distance from centerline to right edge: 140
- Distance from left edge to top flange centerline: 150
- Distance from top flange centerline to centerline: 123.5
- Distance from centerline to right edge: 117
- Distance from left edge to top flange outer edge: 115
- Distance from left edge to top flange inner edge: 100


Side View Dimensions:

- Overall height: 443
- Distance from bottom edge to top flange centerline: 119
- Distance from top flange centerline to bottom edge: 140
- Distance from bottom edge to top flange outer edge: 8
- Distance from top flange centerline to top flange outer edge: 300

Other Features:

- A circular flange with a central hole.
- A rectangular base with a threaded hole labeled M36.
- A top flange with a central hole and a smaller hole.

Für alle übrigen Maße der Stellantriebe/Getriebe siehe Maßblatt neuester Ausgabe
For all other dimensions of actuators/gear boxes refer to latest issue of dimension sheet

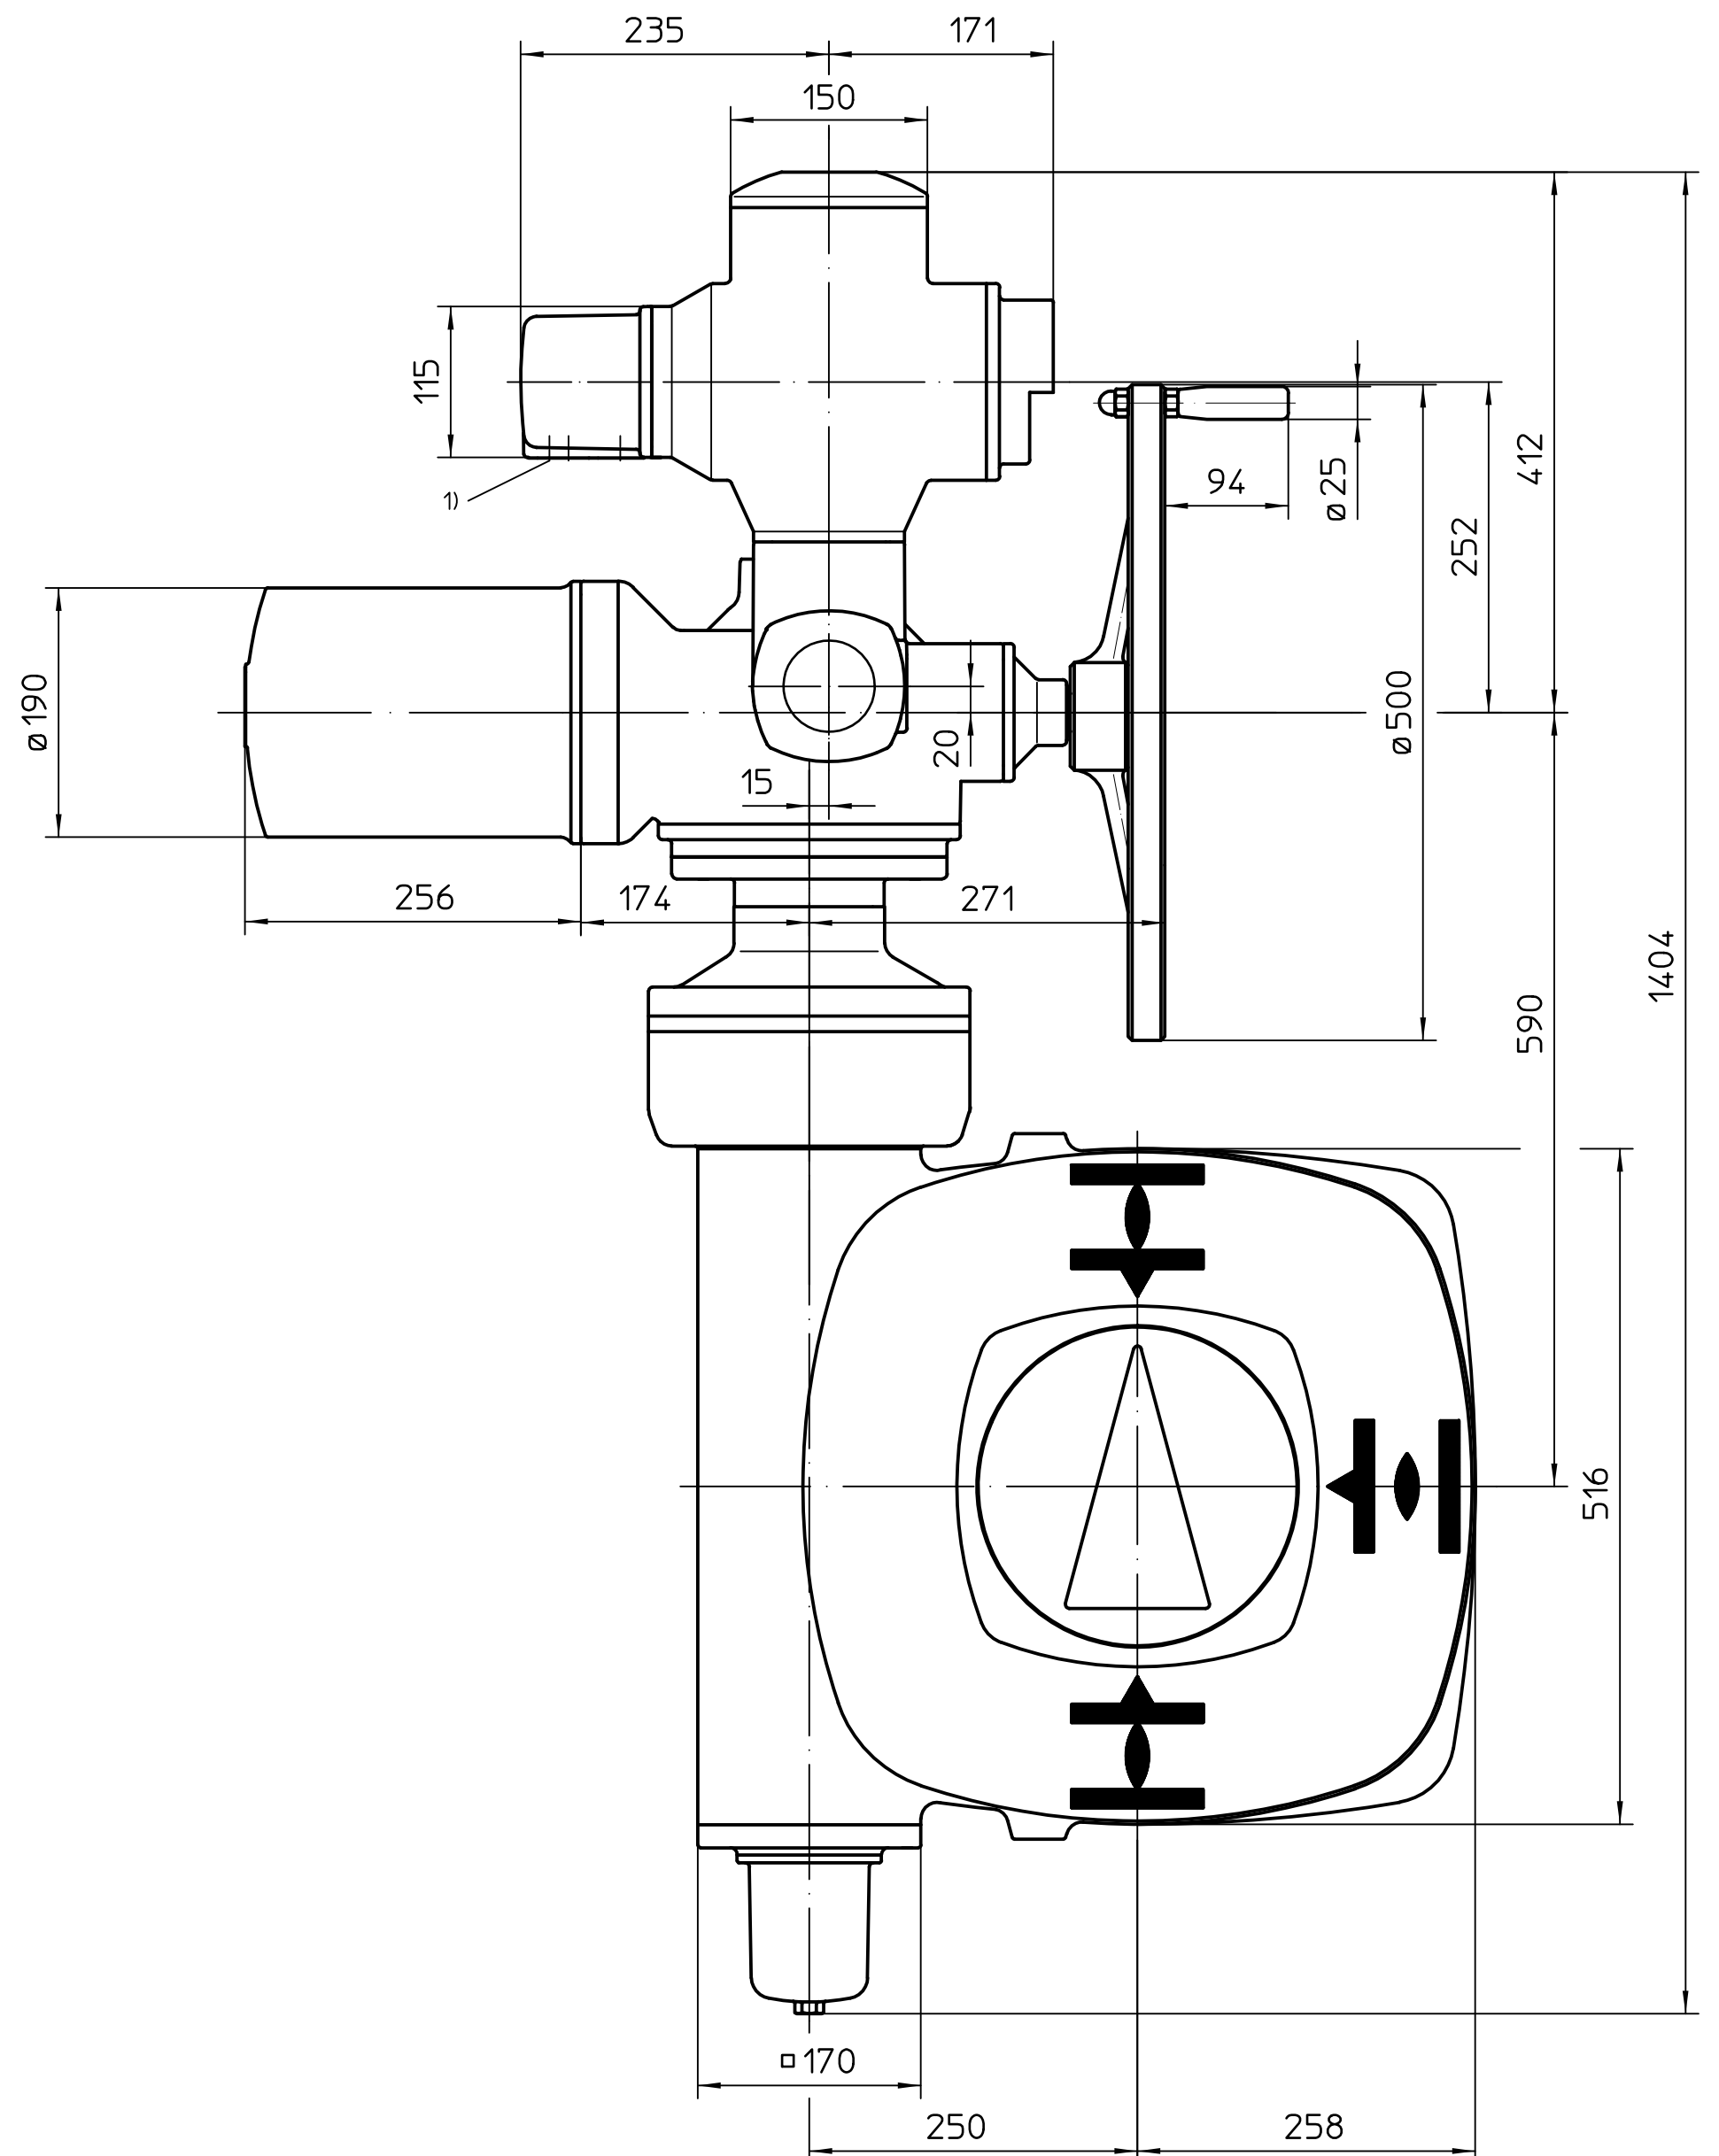

Art.- Nr.				Allgemeintoleranz ISO 2768 - mK		Maßstab 1:5		 AUMA Riester GmbH & Co. KG				
						Datum		Name		SA(R)16.2-AM-GS250.3 -F40-GZ250.3-LL-LR		
				Bearb. 2011-08-24		Duffner		U2.3484				Blatt- Nr. 1
				Gepr. 2011-08-25		Altmann						
				Freig. 2011-08-25		Duffner				4:1/8:1		Anz. 1
				AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218								
Zust.	Änderung	Datum	Name									