

Technical drawing of a mechanical component, likely a pump or motor housing, showing front and side views with dimensions.


Front View Dimensions:


- Overall width: 361
- Overall height: 115
- Top flange width: 115
- Top flange height: 119
- Top flange hole spacing: 67
- Top flange hole diameter: 90
- Mounting bracket width: 100
- Mounting bracket height: 115
- Mounting bracket hole diameter: 100

Side View Dimensions:

- Overall width: 158
- Overall height: 300
- Top flange height: 5
- Top flange diameter: $\phi 58$
- Top flange hole diameter: M16x25
- Top flange hole spacing: 225
- Top flange hole diameter: 254
- Top flange hole diameter: 300
- Top flange hole diameter: 75

1) Gewinde für Kabeleinführungen
gemäß Auftragsbestätigung bzw.
techn. Datenblatt
*Threads for cable entries
according to order acknow-
ledgement or techn. data*

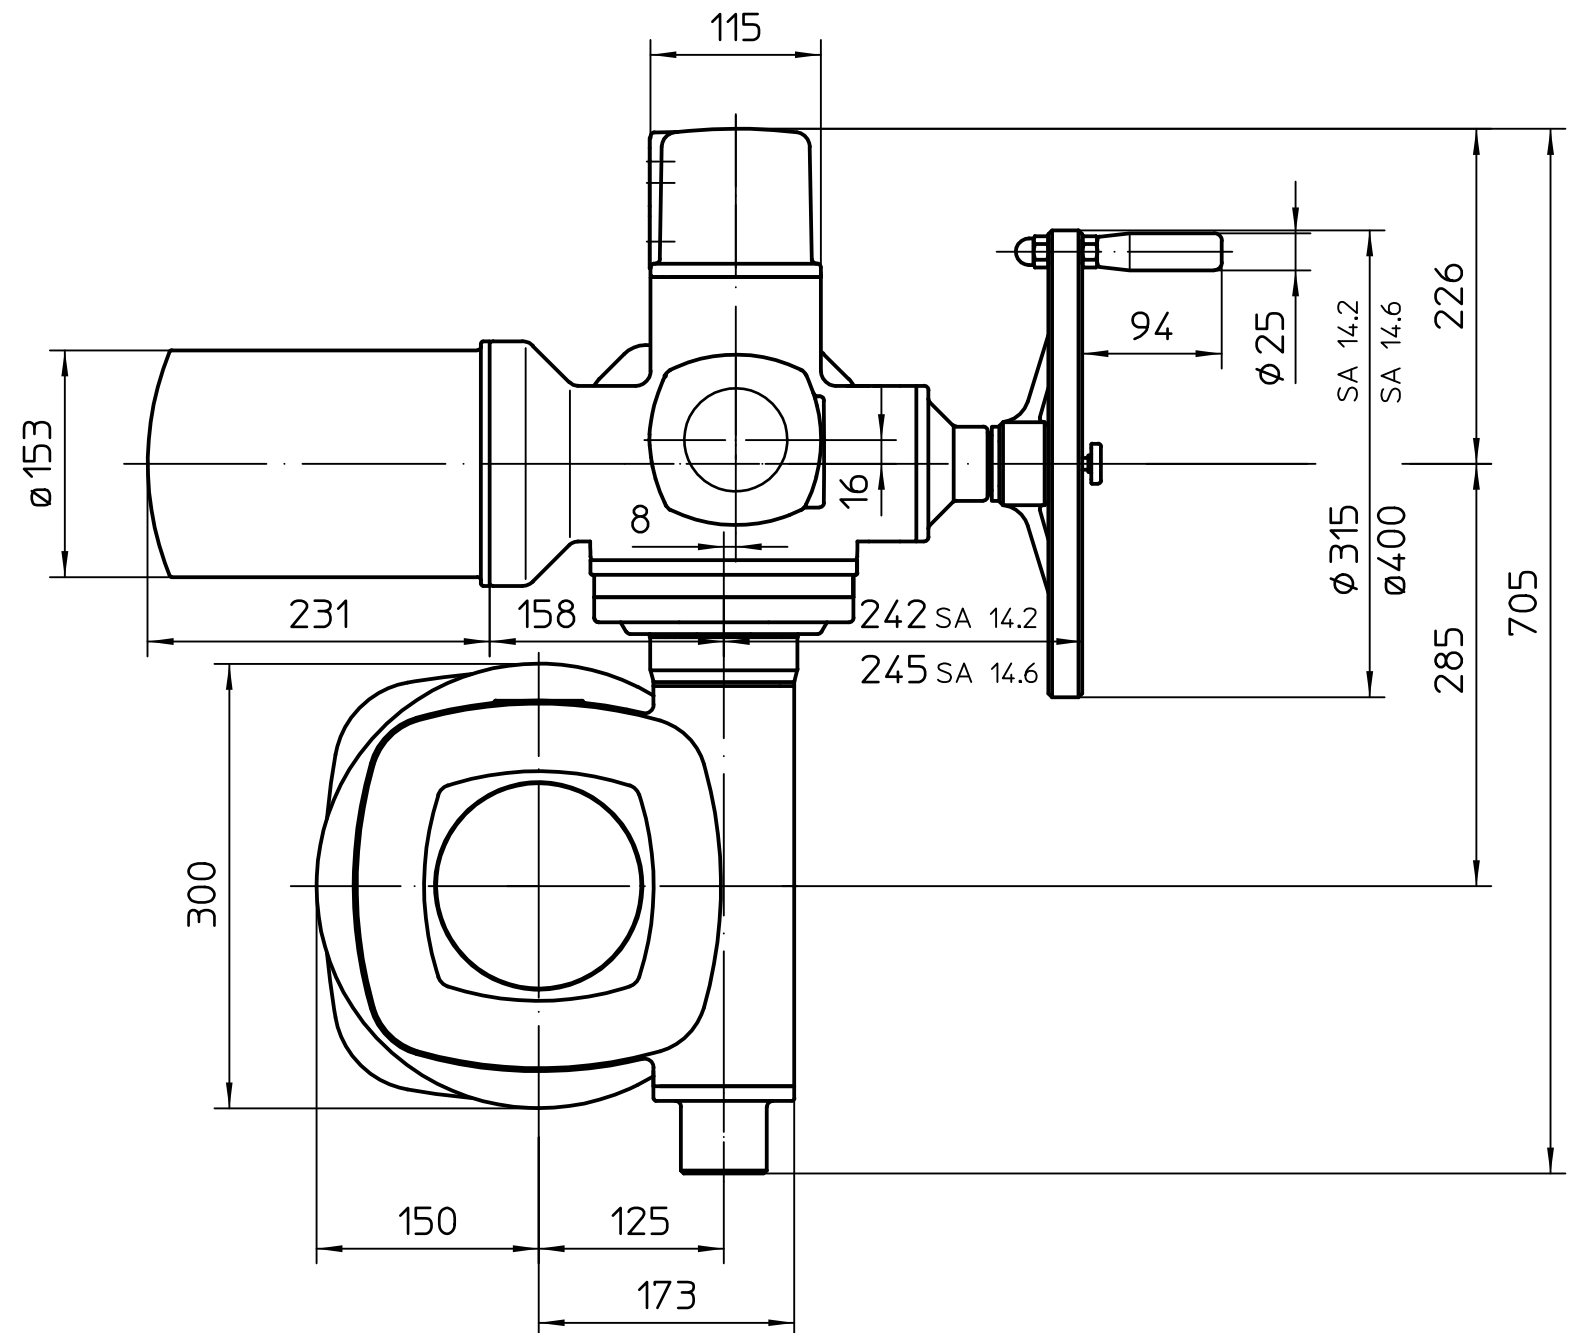

Art.-Nr.					Allgemeintoleranz ISO 2768 - mK		Maßstab		 AUMA Riester GmbH & Co. KG	
							1:5			
						Datum	Name		SA(R)14.2-GS125.3-F25 -Version RR-RL	
					Bearb.	2012-02-03	Altmann			
					Gepr.	2012-02-10	Duffner			
					Freig.	2012-02-10	Altmann			
					AUMA Riester GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218				U3.3641	
									Blatt-Nr. 1 Anz. 1	
	Zust.	Änderung	Datum	Name					gilt auch für/also valid for SA14.6	