


Technical drawing of a mechanical component, likely a valve or actuator, showing front and side views with dimensions.

Front View Dimensions:

- Top flange width: 115
- Top flange hole spacing: 103
- Top flange thickness: 50
- Top flange mounting holes: 3 (indicated by a leader line '1')
- Top flange mounting holes: M30
- Top flange mounting holes: 5
- Top flange mounting holes: 96
- Top flange mounting holes: 115
- Top flange mounting holes: 363

Side View Dimensions:

- Top flange width: 115
- Top flange hole spacing: 103
- Top flange thickness: 50
- Top flange mounting holes: 3 (indicated by a leader line '1')
- Top flange mounting holes: M30
- Top flange mounting holes: 5
- Top flange mounting holes: 96
- Top flange mounting holes: 115
- Top flange mounting holes: 363

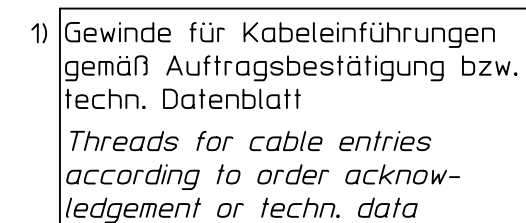

Art.- Nr.					Allgemeintoleranz ISO 2768 - mK		Maßstab 1:5		 AUMA Riester GmbH & Co. KG					
							Datum		Name		SA(R)10.2-GS200.3 -F35-GZ200.3-RR-RL			
					Bearb.		2013-05-23		Goltsev				U2.4044	
					Gepr.		2013-05-24		Duffner					
					Freig.		2013-05-24		Goltsev					
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			
											U2.4044			