

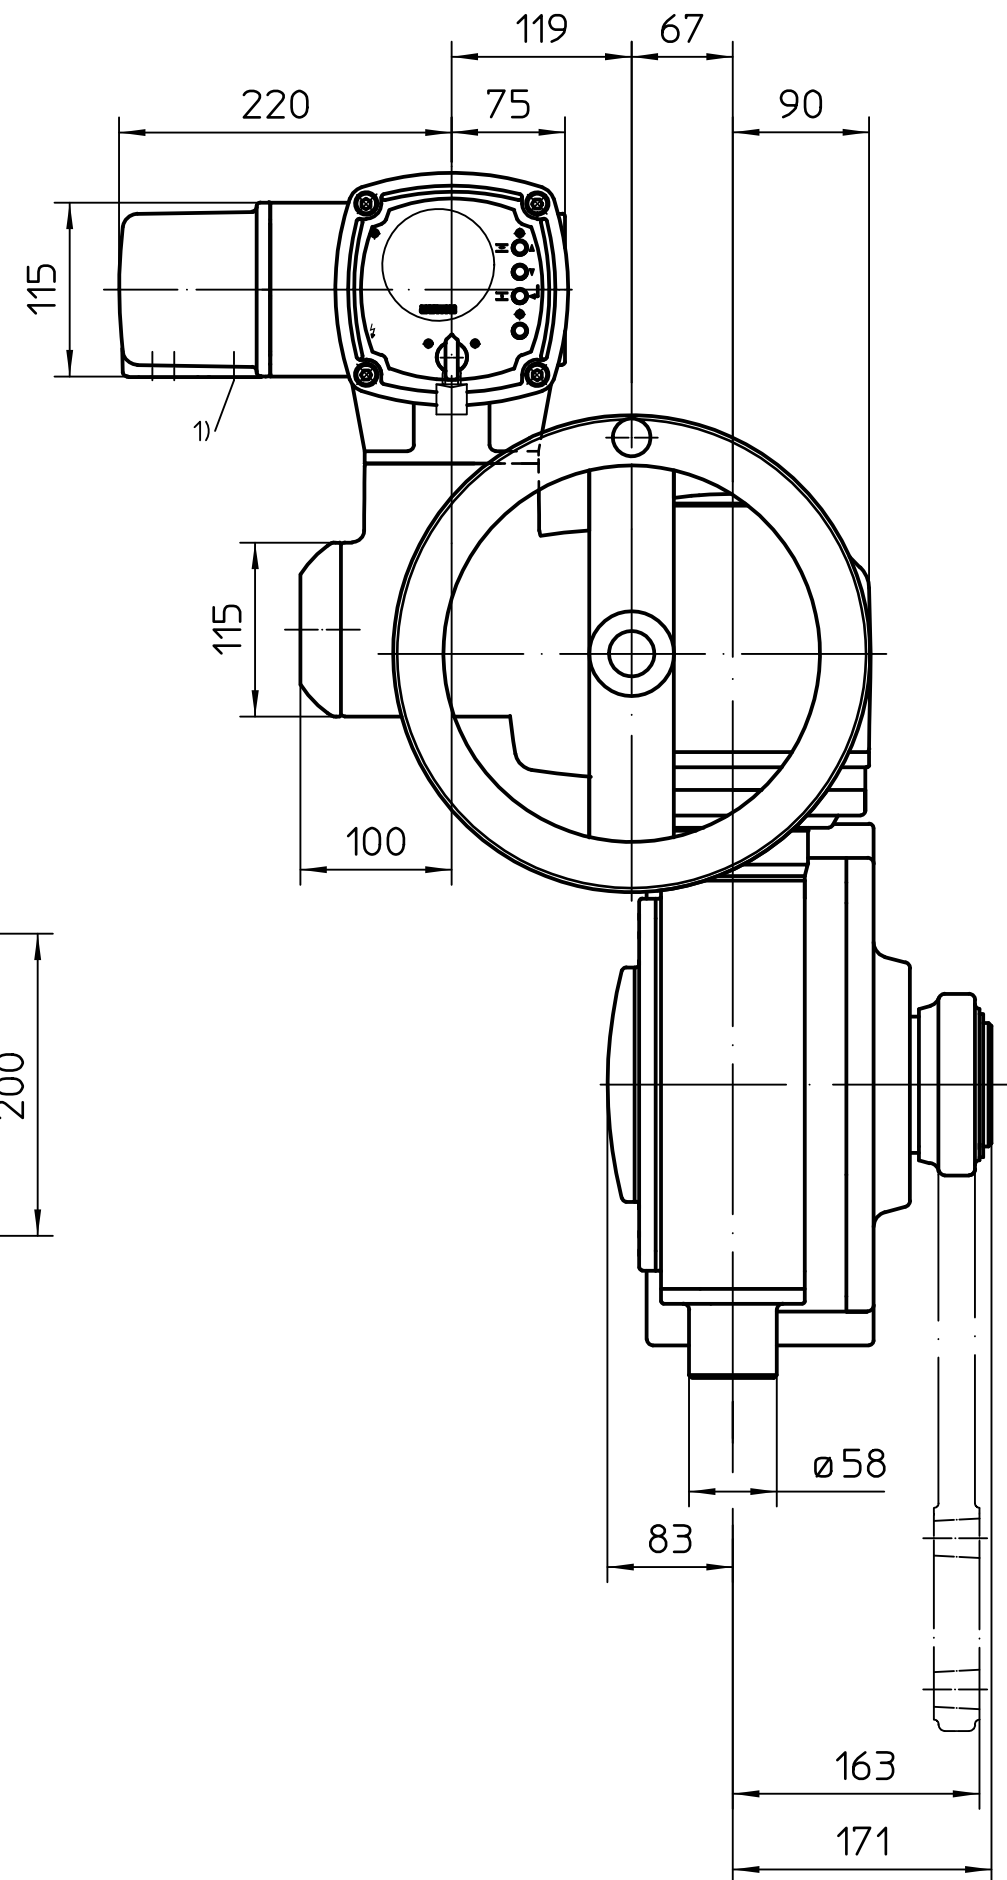


Technical drawing of the front view of a mechanical component. The drawing shows a cylindrical body with a flange on the right. Dimensions are indicated: a total length of 349, a distance of 155 from the left face to the start of the flange, and a flange thickness of 84.

Technical drawing of the front view of a mechanical component, likely a valve actuator. The drawing shows a rectangular main body with a handle on the right and a mounting bracket on the left. Dimensions are indicated: a top flange with a width of 60 and a height of 33; a main body height of 200; a mounting bracket height of 18; a bottom flange width of 57; and a total width of 150. A vertical dashed line indicates the center of symmetry.

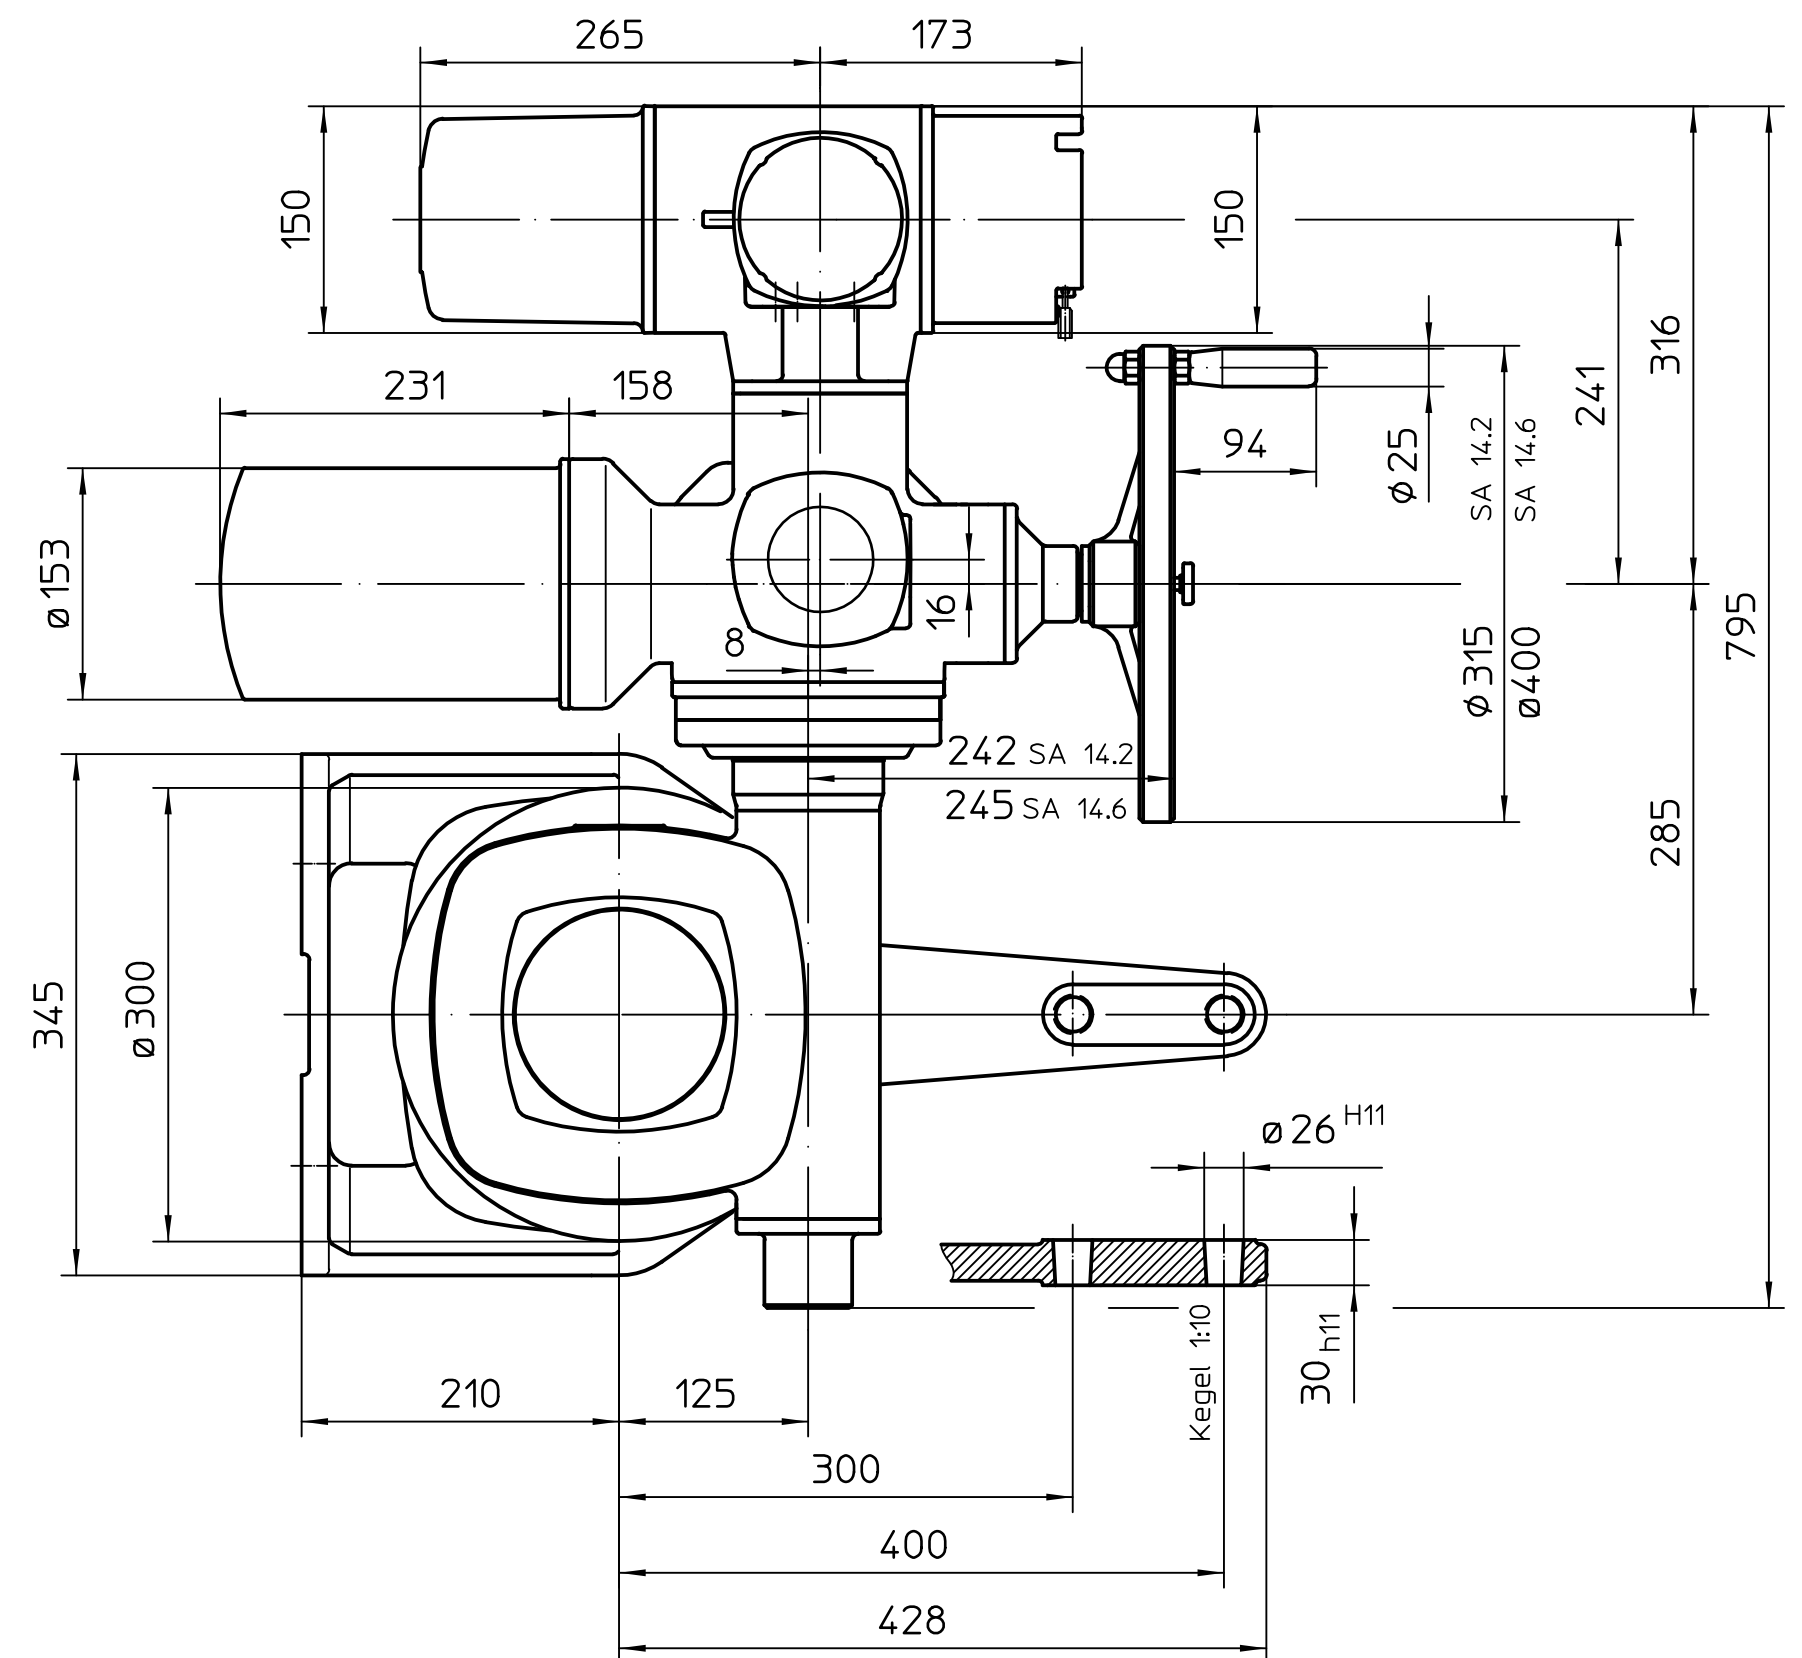

Für alle übrigen Maße der Stellantriebe/Getriebe siehe Maßblatt neuester Ausgabe
For all other dimensions of actuators/gear boxes refer to latest issue of dimension sheet



1) Gewinde für Kabeleinführungen
gemäß Auftragsbestätigung bzw.
techn. Datenblatt
*Threads for cable entries
according to order acknow-
ledgement or techn. data*

Art.- Nr.				Allgemeintoleranz ISO 2768 - mK		Maßstab		auma® AUMA Riesler GmbH & Co. KG			
						1:5		SA(R)14.2-AC2-GF125.3 -Version-RR-RL			
					Datum	Name					
				Bearb.	2014-07-25	Goltsev					
				Gepr.	2014-07-28	Viesel					
				Freig.	2014-07-28	Goltsev		U2.4452			
				AUMA Riesler GmbH & Co. KG Postfach 1362 D-79373 Müllheim Tel. 07631/809-0 Fax 07631/13218							
	Zust.	Änderung	Datum	Name				Blatt- Nr. 1 Anz. 1			
								gilt auch für/also valid for SA14.6			