



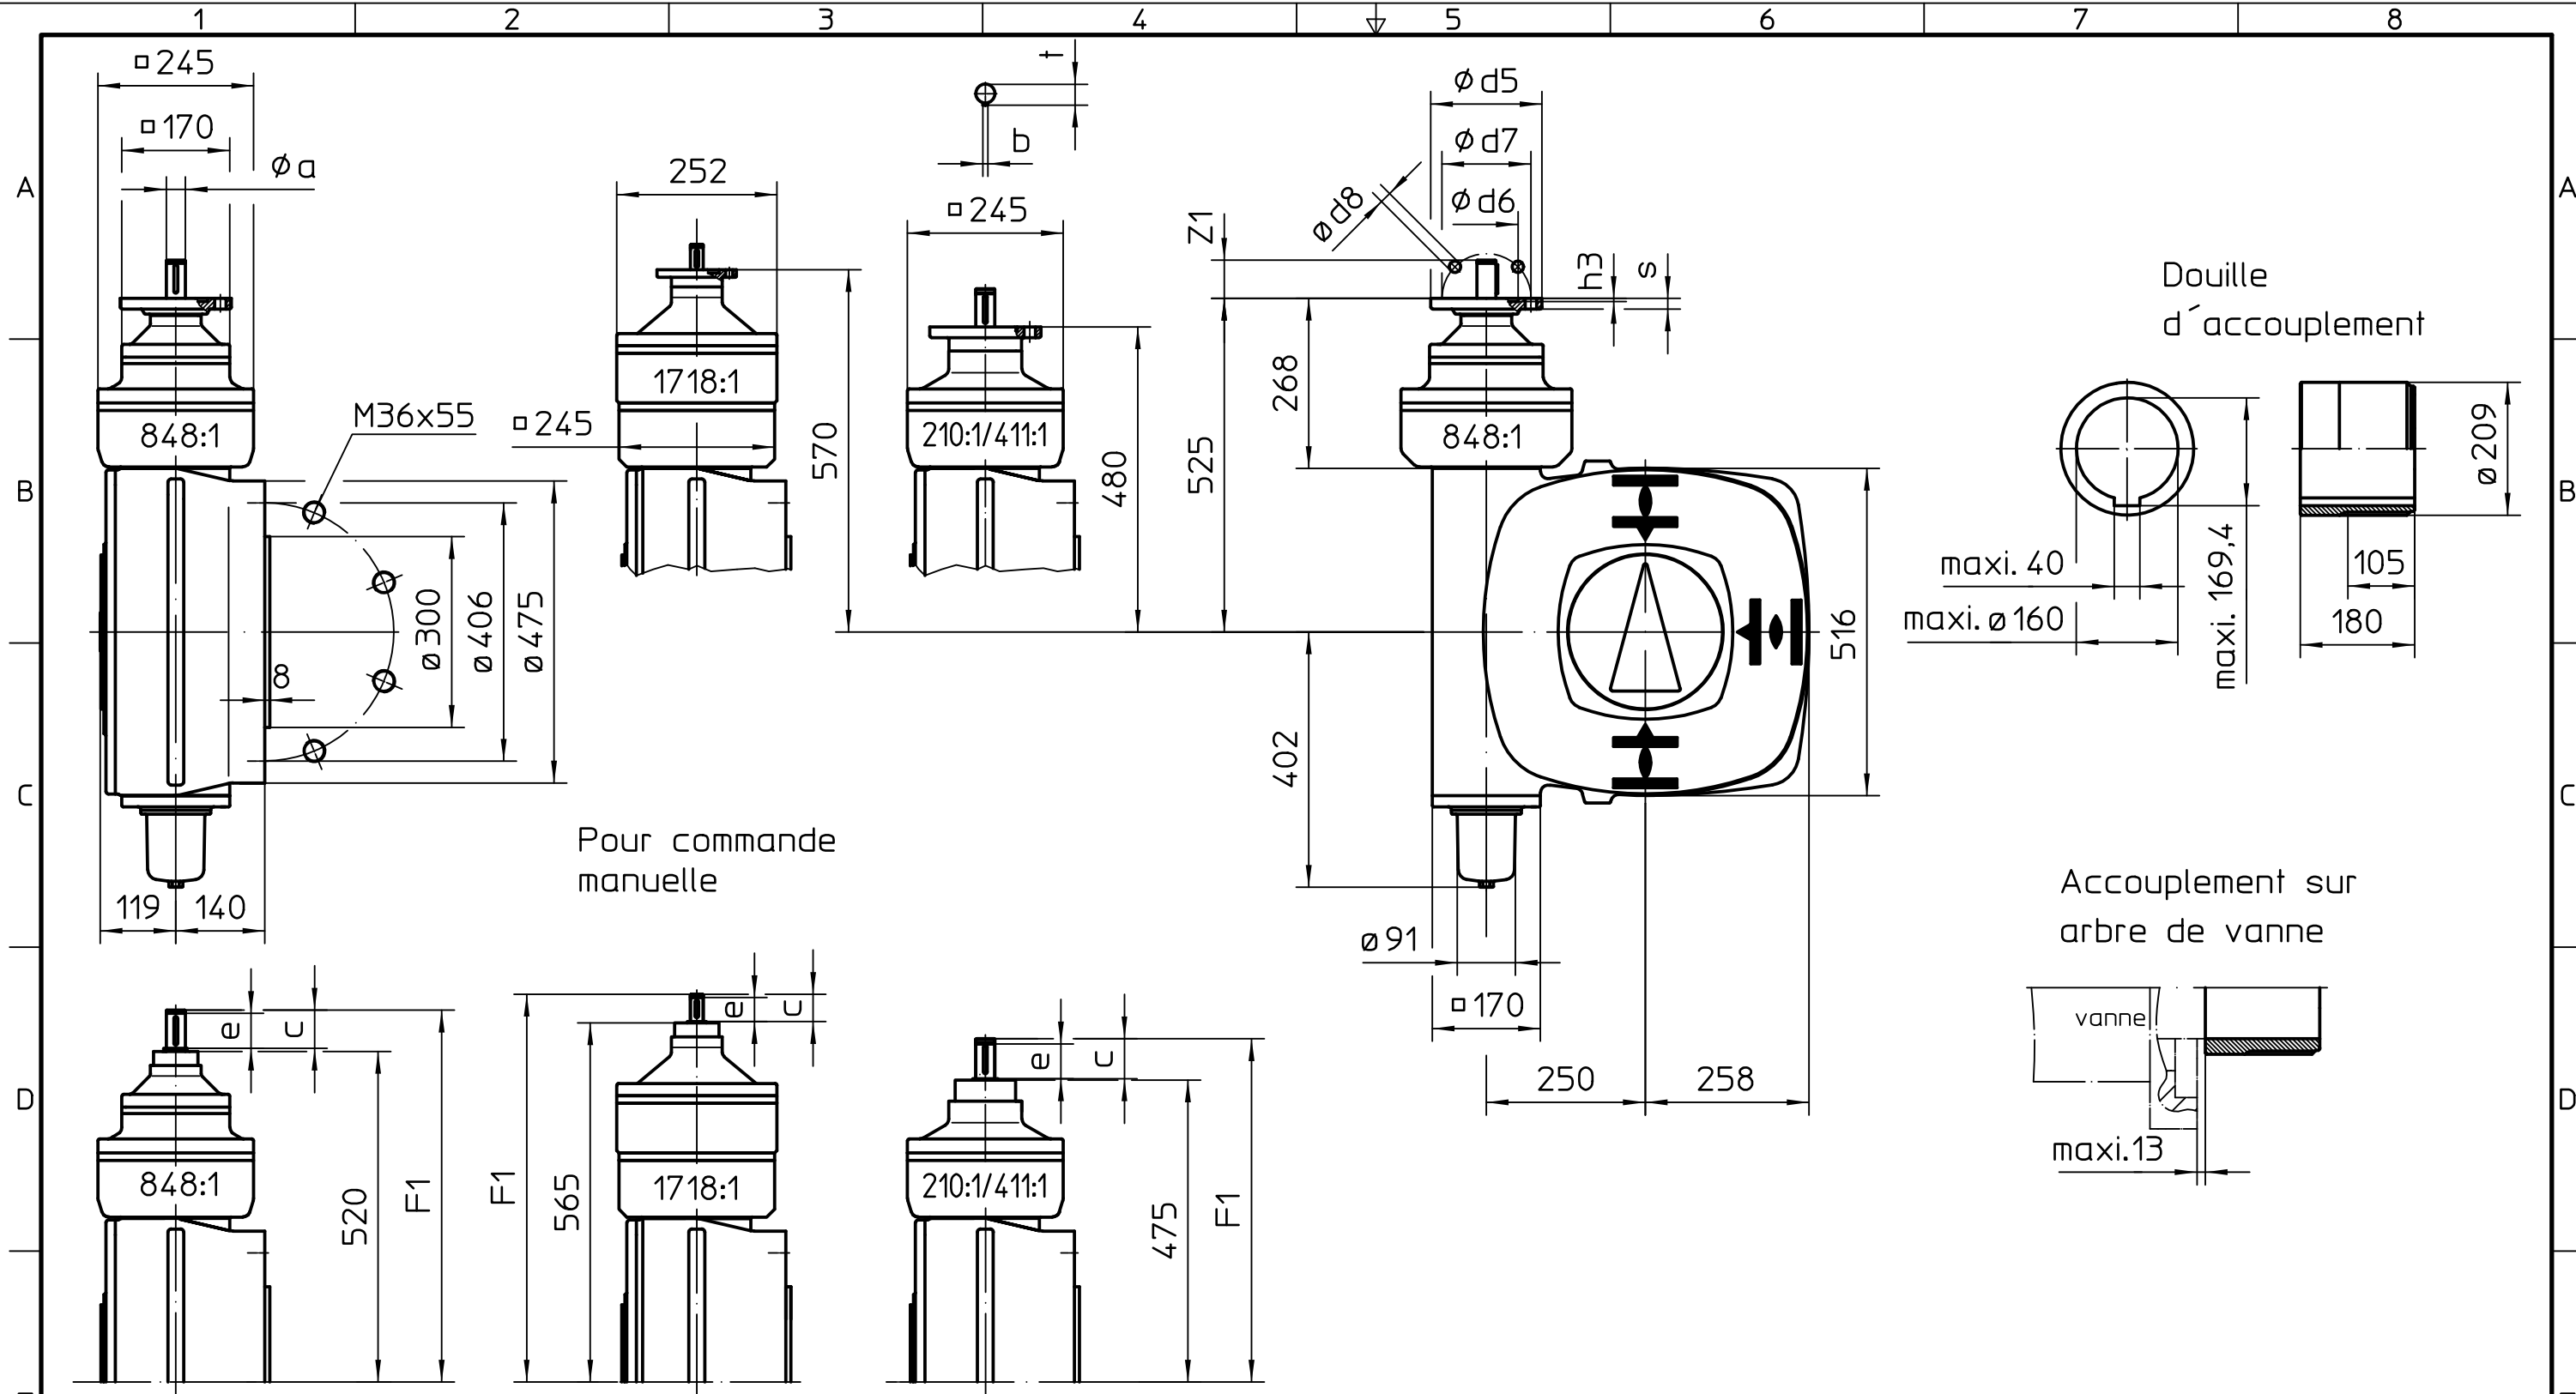

Pour commande manuelle


Accouplement sur arbre de vanne

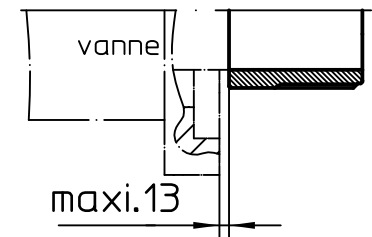

Toutes les dimensions en mm

Pour toutes les autres dimensions des servomoteurs/réducteurs, cf. fiche de dimension la plus récente

	1718:1				848:1				210:1				411:1				848:1				1718:1				210:1			
	F10/G0				G1/2/F14				G3/F16																			
$\phi d5$	125				175				210																			
$\phi d6$	70/60				100				130																			
$\phi d7$	102				140				165																			
$\phi d8$	11				18				22																			
$h3$	5				5				6																			
ϕa	20	30	20	30	30	40	30	20	30	20	30	30	40	30	20	30	30	40	30	20	30	30	40	30	40	30	20	30
c	43	60	43	60	60	73	60	43	60	43	60	60	73	60	43	60	60	73	60	43	60	60	73	60	43	60	43	60
e	38	55	38	55	55	65	55	38	55	38	55	55	65	55	38	55	55	65	55	38	55	55	65	55	38	55	38	55
s	12				17				25																			
$Z1$	40	60	40	60	60	80	60	40	60	40	60	60	80	60	40	60	60	80	60	40	60	60	80	60	40	60	40	60
b	6	8	6	8	8	12	8	6	8	6	8	8	12	8	6	8	8	12	8	6	8	8	12	8	6	8	6	8
t	22,5	33	22,5	33	33	43	33	22,5	33	22,5	33	33	43	33	22,5	33	33	43	33	22,5	33	33	43	33	22,5	33	22,5	33
$F1$	610	630	565	585	540	560	540	565	585	540	560	540	565	585	540	560	540	565	585	540	560	540	565	585	540	560	540	565

Echelle
1:10**auma®**
AUMA Riester GmbH & Co. KG

Edité	2022-07-20	Goltsev
Testé	2022-07-20	Demir
Approuvé	2022-07-20	Goltsev

AUMA Riester GmbH & Co. KG
P.O. Box 1362
79373 Muellheim/Germany
Tel. +49 7631 809-0
Fax +49 7631/13218

GS250.3-F40
-Version LL-LR**U3.1900**

210:1 / 411:1 / 848:1 / 1718:1

Page
1
Qté
1